Ontario Geological Survey
Aggregate Resources Inventory Paper 45

AGGREGATE RESOURCES INVENTORY OF CITY OF BURLINGTON Regional Municipality of Halton SOUTHERN ONTARIO

by
Staff of the Engineering and Terrain Geology Section
Ontario Geological Survey

1982

Ontario
Ministry of Natural Resources
Hon. Alan W. Pope
Minister
W. T. Foster
Deputy Minister

© OMNR-OGS 1982

Publications of the Ontario Ministry of Natural Resources
and price list
are obtainable through the
Ontario Ministry of Natural Resources, Map Unit, Public Service Centre
Queen's Park, Toronto, Ontario
and
The Ontario Government Bookstore
880 Bay Street, Toronto, Ontario

Orders for publications should be accompanied by cheque
or money order, payable to the Treasurer of Ontario

ISSN 0708-2061
ISBN 0-7743-5223-X

This report was prepared by: Staff of the Aggregate Assessment Office, Engineering and Terrain Geology Section of the Ontario Geological Survey, Ontario Ministry of Natural Resources, 77 Grenville Street, Toronto, M5S 1B3, Telephone (416) 965-1182.

Project Supervisor: Dale W. Scott
Text Prepared by: J.Z. Fraser
Compilation and Drafting by: Staff of the Aggregate Assessment Office

The Mineral Resources Staff of Cambridge District, Central Region of the Ministry of Natural Resources assisted in the collection of data, field checking and review of this report.

Parts of this publication may be quoted if credit is given to the Ontario Ministry of Natural Resources, Ontario Geological Survey. It is recommended that reference to this report be made in the following form:

Ontario Geological Survey
1982: Aggregate Resources Inventory of the City of Burlington, Regional Municipality of Halton; Ontario Geological Survey, Aggregate Resources Inventory Paper 45, 31 p., 6 tables, 3 maps, scale 1:50 000.

Every possible effort is made to insure the accuracy of the information contained in this report, but the Ministry of Natural Resources does not assume any liability for errors that may occur. Source references are included in the report and users may wish to verify critical information.

500-81-Carswell

CONTENTS

Page

Abstract v
Introduction 1
Part I - Inventory Methods 2
Field and Office Methods 2
Resource Tonnage Calculation Techniques 2
Sand and Gravel Resources 2
Bedrock Resources 3
Units and Definitions 3
Part II - Data Presentation and Interpretation 4
Map 1 Distribution of Sand and Gravel Deposits 4
Map 2 Selected Sand and Gravel Resource Areas 4
Site Specific Criteria 5
Deposit Size 5
Aggregate Quality 5
Location and Setting 6
Regional Considerations 6
Map 3 Bedrock Resources 7
Selection Criteria 7
Selected Resource Areas 7
Part III - Assessment of Aggregate Resources in the City of Burlington 9
Location and Population 9
Physiography and Surficial Geology 9
Extractive Activity 10
Selected Sand and Gravel Resource Areas 10
Selected Sand and Gravel Resource Area 1 10
Selected Sand and Gravel Resource Area 2 11
Sand and Gravel Resource Areas of Secondary Significance 11
Bedrock Geology 11
Selected Bedrock Resource Areas 12
Selected Bedrock Resource Area 1 12
Selected Bedrock Resource Areas 2, 3 and 4 12
Summary 13
References 20
Appendix A - Suggested Additional Reading 21
Appendix B - Glossary 22
Appendix C - Geology of Sand and Gravel Deposits 25
Appendix D - Geology of Bedrock Deposits 28

TABLES

1 - Total Sand and Gravel Resources, City of Burlington 14
2 - Sand and Gravel Pits, City of Burlington 15
3 - Selected Sand and Gravel Resource Areas, City of Burlington 16
4 - Total Identified Bedrock Resources, City of Burlington 17
5 - Quarries, City of Burlington 18
6 - Selected Bedrock Resource Areas, City of Burlington 19

FIGURES

1 - Key Map Showing Location of the City of Burlington v
2 - Bedrock Geology of Southern Ontario 28

MAPS
(back pocket)

1 - Distribution of Sand and Gravel Deposits, City of Burlington, Scale 1:50 000.
2 - Selected Sand and Gravel Resource Areas, City of Burlington, Scale 1:50 000.
3 - Bedrock Resources, City of Burlington, Scale 1:50 000.

ABSTRACT

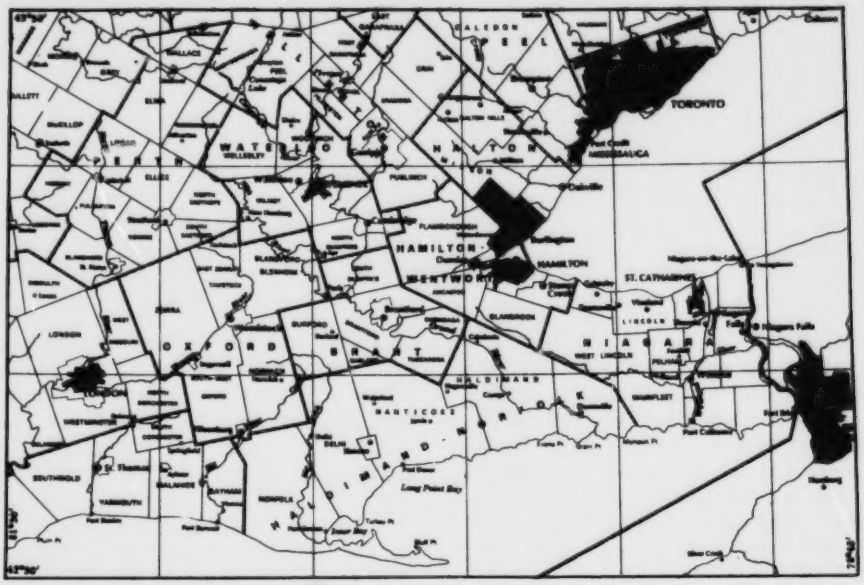

Figure 1 - Key Map Showing Location of the City of Burlington, Scale 1:1 800 000.

This report includes both an inventory and evaluation of sand and gravel as well as bedrock resources in the City of Burlington. The report is part of the Aggregate Resources Inventory Program for townships and municipalities designated under The Pits and Quarries Control Act, 1971.

In the City of Burlington, two areas containing sand and gravel have been selected for possible resource protection at the primary level. Selected Sand and Gravel Resource Areas occupy 1020 acres (415 ha), exclusive of licenced areas. An estimated 385 acres (156 ha) are currently available for extraction, containing possible resources of approximately 24 million tons (22 million tonnes). The portions of the Selected Areas which are available for extraction represent four percent of the total area occupied by sand and gravel deposits in the township and nine percent of the total resource tonnage.

Selected Sand and Gravel Resource Area 1, an outwash deposit located in the northwest corner of the city, is the most important source of natural aggregate. The Area contains an estimated 23 million tons (21 million tonnes) of sand and gravel suitable for crushed aggregate. Selected Sand and Gravel Resource Area 2 is a small outwash deposit located at the northern boundary of the city. The deposit contains approximately 1 million tons (1 million tonnes) of sand and gravel suitable for crushed aggregate.

Sand and gravel resources in the City of Burlington may be insufficient to meet local demand in the near future, therefore care should be taken to ensure the availability of as much of the remaining resources as possible.

Bedrock underlying the city consists of the Amabel and Queenston Formations and the Clinton and Cataract Groups. Stone from the Amabel Formation is suitable for a range of high-quality crushed products and all areas of the formation covered by thin drift have been selected for possible resource protection. Bedrock Resource Area 1 has estimated resources of 800 million tons (730 million tonnes). The Queenston Formation is very well suited for the manufacture of structural clay products and is a resource of provincial significance for these uses. Pressure from urban development has sterilized much of the Queenston's resources. Three specific areas have been selected for resource protection. However, since the Queenston shale is such a valuable resource and urbanization has sterilized a large part of the area underlain by this formation, it is recommended that protection measures be considered for all parts of the Queenston covered by less than 25 feet (8 m) of overburden. The three Areas that have been selected contain total estimated resources of 66 million tons (60 million tonnes).

Selected Resource Areas are not intended to be permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such Resource Areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

AGGREGATE RESOURCES INVENTORY OF CITY OF BURLINGTON[1]

BY
STAFF OF THE ENGINEERING
AND TERRAIN GEOLOGY SECTION

INTRODUCTION

Mineral aggregates, which include bedrock-derived crushed stone as well as naturally formed sand and gravel, constitute the major raw material in Ontario's road-building and construction industries. Very large amounts of these materials are used each year throughout the Province. For example, in 1979, the total tonnage of mineral aggregates extracted was 144 million tons (131 million tonnes), greater than that of any other metallic or nonmetallic commodity mined in the Province (Ontario Ministry of Natural Resources 1980).

Although mineral aggregate deposits are plentiful in southern Ontario, they are fixed-location, nonrenewable resources which can be exploited only in those areas where they occur. Mineral aggregates are characterized by their high bulk and low unit value so that the economic value of a deposit is a function of its proximity to a market area as well as its quality and size. The potential for extractive development is usually greatest in urban fringe areas where land use competition is extreme. For these reasons the availability of adequate resources for future development is now being threatened in some areas.

Comprehensive planning and resource management strategies are required to make the best use of available resources, especially in those areas experiencing rapid development. Such strategies must be based on a sound knowledge of the total mineral aggregate resource base at both local and regional levels. The purpose of the Aggregate Resources Inventory is to provide the basic geological information required to include potential mineral aggregate resource areas in planning strategies and official plans. The reports should form the basis for discussion on those areas best suited for possible extraction. The aim is to assist decision-makers in protecting the public well-being by ensuring that adequate resources of mineral aggregate remain available for future use.

This report is a technical background document, based for the most part on geological information and interpretation. It has been designed as a component of the total planning process and should be used in conjunction with other planning considerations, to ensure the best use of a municipality's resources.

The report includes an assessment of sand, gravel and crushed bedrock. The most recent information available has been used to prepare the reports. As new information becomes available, revisions may be necessary.

[1] Manuscript accepted for publication by Chief Engineering and Terrain Geology Section, Nov. 2, 1981. This paper is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

PART I - INVENTORY METHODS

FIELD AND OFFICE METHODS

The methods used to prepare the report primarily involve the interpretation of published geological data such as bedrock and surficial geology maps and reports (see References). Wherever possible, field examination of potential resource areas was also undertaken to confirm interpretations made in the office. Field methods included the examination of natural and man-made exposures of granular material. Most observations were made at quarries and sand and gravel pits located from records held by the Ontario Ministry of Transportation and Communications, the Ontario Geological Survey, and by Regional and District Offices of the Ontario Ministry of Natural Resources. Observations made at pit sites included estimates of the total face height and the proportion of gravel- and sand-size fragments in the deposit. Observations were also made of the shape and lithology of the particles. These characteristics are important in estimating the quality and quantity of the aggregate. In areas of limited exposure, test pitting, soil probing and hand-augering techniques were used to assess subsurface materials. Air photos at various scales were used to determine the continuity of deposits, especially in areas of limited subsurface information.

In the office, the pit data were supplemented by information on file with the Engineering Materials Office of the Ontario Ministry of Transportation and Communications. Data contained in these files include field estimates of the depth, composition and "workability" of deposits as well as laboratory analyses of the physical properties and chemical suitability of the aggregate. Information concerning the development history of the pits and acceptable uses of the aggregate is also recorded. The location, size, and depth of extraction of pits licenced under The Pits and Quarries Control Act, 1971 were obtained from records held by Regional and District Offices of the Ontario Ministry of Natural Resources. The cooperation of the above named groups in the compilation of inventory data is gratefully acknowledged.

Water well records, held by the Ontario Ministry of the Environment, were used in some areas to corroborate thickness estimates, or to indicate the presence of buried granular material. These records were used only in conjunction with other evidence. Topographic maps of the National Topographic System, at a scale of 1:50 000, were used as a compilation base for the field and office data. The information was then transferred to a township base map, also at a scale of 1:50 000, prepared by the Cartography Section of the Lands and Waters Group, Ontario Ministry of Natural Resources, for presentation in the report.

RESOURCE TONNAGE CALCULATION TECHNIQUES

SAND AND GRAVEL RESOURCES

Once the interpretative boundaries of the aggregate units have been drawn, quantitative estimates of the possible resources available can be made. Generally, the volume of a deposit can be calculated if its areal extent and average thickness are known or can be estimated. The computation methods used are as follows: First, the area of the deposit, as outlined on the final base map, is calculated in acres. The thickness values used are an approximation of the deposit thickness, based on the face heights of pits developed in the deposit or on subsurface data such as water well logs. Original tonnage values can then be calculated by multiplying the volume of the deposit by 2500 (the density factor). This factor is approximately the number of tons in a one-foot thick layer of sand and gravel, one acre in extent, assuming an average density of 110 pounds per cubic foot.

Tonnage = Area x Thickness x Density Factor

Tonnage calculated in this manner must be considered only as an estimate. Furthermore, such tonnages represent amounts that existed prior to any extraction of material (i.e. original tonnage) (Table 1, Column 4).

The Selected Sand and Gravel Resource Areas in Table 3 represent only those parts of the deposit lying outside licenced areas (Column 2).

Two successive subtractions are made from the unlicenced area. Column 3 accounts for the number of acres unavailable due to the presence of permanent cultural features and their associated setback requirements. Column 4 accounts for those areas lying outside of licenced properties that have previously been extracted (e.g. wayside pits are included in this cateogry). The remaining figure is the area of the deposit currently available for extraction (Column 5). The available area is then multiplied by the estimated deposit thickness and the density factor (Column 5 x Column 6 x 2500) to give an estimate of the sand and gravel tonnage presently available for extractive development and/or resource protection.

BEDROCK RESOURCES

The method used to calculate resources of bedrock-derived aggregate is much the same as that described above. The areal extent of favourable bedrock formations overlain by less than 50 feet (15 m) of unconsolidated overburden is determined from bedrock geology maps, drift thickness and bedrock topography maps and from the interpretation of water well records. The measured extent of such areas is then multiplied by the estimated workable thickness of the formation, based on stratigraphic analyses and on estimates of existing quarry faces in the unit. In some cases a standardized estimate of a workable thickness of 60 feet (18 m) is used. Volume estimates are then multiplied by 3600 (the estimated weight in tons of a one-foot thick section of dolostone, one acre in extent, assuming a bulk density of 165 pounds per cubic foot).

Resources of sandstone are calculated using a bulk density estimate of 146 pounds per cubic foot or approximately 3200 tons per acre. Shale resources are calculated on the basis of a bulk density estimate of 150 pounds per cubic foot.

UNITS AND DEFINITIONS

Although most of the measurements and other primary data available for resource tonnage calculations are given in Imperial units, Metric units have also been given in the text and on the tables which accompny the report. The Metric equivalent of the data is shown in brackets after or directly below the corresponding Imperial figures. Data are generally rounded off in accordance with the Ontario Metric Practice Guide (Metric Committee 1975).

The tonnage estimates made for sand and gravel as well as bedrock-derived aggregates are termed possible resources in accordance with terminology of the Ontario Resource Classification Scheme (Robertson 1975, p. 7) and with the Association of Professional Engineers of Ontario (1976) (see Glossary, Appendix B).

PART II - DATA PRESENTATION AND INTERPRETATION

Three maps, each portraying a different aspect of the aggregate resources in the municipality, accompany the report. Map 1, "Distribution of Sand and Gravel Deposits", gives a comprehensive inventory of the sand and gravel resources in the report area. Map 2, "Selected Sand and Gravel Resource Areas", shows those deposits which are considered to represent the largest and/or highest quality resources in the area. Map 3, "Bedrock Resources", shows the distribution of bedrock formations, the distribution of overlying unconsolidated sediments, and identifies the Selected Bedrock Resource Areas.

MAP 1: DISTRIBUTION OF SAND AND GRAVEL DEPOSITS

Map 1 is derived directly from the existing surficial geology maps of the area or from air photo interpretation where surficial mapping is incomplete. It shows the extent of sand and gravel deposits within the study area and serves as a base for the calculation of the total sand and gravel resources.

Map 1 presents a summary of all available information related to the quantity and quality of aggregate contained in all the known aggregate deposits in the study area. Much of this information is contained in the symbol which identifies each deposit. The Deposit Symbol is similar to those used in soil mapping and land classification systems commonly in use in North America. The components of the symbol indicate the gravel content, thickness of material, origin (type), and quality limitations for a given deposit. These components are illustrated by the following example:



This symbol identifies an outwash deposit 10 to 20 feet (3 to 6 m) thick containing more than 35 percent gravel. Excess fines may limit uses of the aggregate in the deposit.

The "gravel content" and "thickness class" are basic criteria for distinguishing different deposits. The "gravel content" symbol is an upper case "S" or "G". The "S" indicates that the deposit is generally "sandy" and that gravel-sized aggregate makes up less than 35 percent of the whole deposit. "G" indicates that the aggregate probably contains more than 35 percent gravel.

The "thickness class" indicates a depth range which is related to the potential resource tonnage for each deposit. Four thickness class divisions have been established as shown in the legend for Map 1.

Two smaller sets of letters, divided from each other by a horizontal line, follow the thickness class number. The upper series of letters identify the geologic deposit type (the types are summarized with respect to their main geologic and extractive characteristics in Appendix C) and the lower series of letters identify the main quality limitations that may be present in the deposit as discussed in the next section.

The other information presented on Map 1 is designed to give an indication of the present level of extractive activity in the study area. Those areas which are licenced for extraction under The Pits and Quarries Control Act, 1971 are shown by a solid outline and identified by a number which refers to the pit descriptions in Table 2. Each description notes the owner, location and licenced acreage of the pit, as well as the estimated face height and percentage gravel. A number of unlicenced pits (abandoned pits or wayside pits operating under authority of a permit) are also identified and numbered on Map 1 and described in Table 2.

MAP 2: SELECTED SAND AND GRAVEL RESOURCE AREAS

Map 2 is an interpretative map derived from an evaluation of the deposits shown on Map 1. The deposits identified on Map 2 are those which are considered to be important in ensuring an adequate resource base for the future.

All the selected sand and gravel resource areas are first delineated by geological boundaries and then classified into three levels of significance: primary; secondary; and tertiary. These areas are identified on Map 2 by different shading patterns.

Each area of primary significance is assessed as to its probable relative value as a resource in the municipality and is given a deposit number which denotes its ranking order. All such deposits are shown by a medium-grey tone on Map 2.

Selected Aggregate Resource Areas of primary significance are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such resource areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

Deposits of secondary significance are not ranked numerically in this report, but are indicated by a light grey tone on Map 2. Such deposits are believed to contain significant amounts of sand and gravel. Although deposits of secondary significance are not considered to be the "best" resource areas in a municipality, they may contain large quantities of sand and gravel and should be considered an integral component of the aggregate supply of the municipality.

Areas of tertiary significance are indicated on the map by a dashed line but have no grey tone. They are neither rated nor considered to be important resource areas because of their low available resources, or because of possible difficulties in extraction. Such areas may be useful for local needs but are unlikely to support large-scale development.

The process by which deposits are evaluated and selected involves the consideration of two sets of criteria. The main selection criteria are site specific, related to the characteristics of individual deposits. Factors such as deposit size, aggregate quality, and deposit location and setting are considered in the selection of those deposits best suited for extraction development. A second set of criteria involves the assessment of local aggregate resources in relation to the quality, quantity, and distribution of resources in the region in which the municipality is located. The intent of such a process of evaluation is to ensure the continuing availability of sufficient resources to meet possible future demands.

SITE SPECIFIC CRITERIA

DEPOSIT SIZE

Ideally, selected deposits should contain available sand and gravel resources large enough to support a commercial pit operation using a stationary or portable processing plant. In practice, much smaller deposits may be of significant value depending on the overall reserves in the rest of the municipality. Generally, deposits in Class 1, i.e. those thicker than 20 feet (6m) and containing more than 35 percent crushable gravel are considered to be most favourable for commercial development. Thinner deposits may be valuable in municipalities with low total resources.

AGGREGATE QUALITY

The limitations of natural aggregates for various uses result from variations in the lithology of the particles composing the deposit, and from variations in the size distribution of these particles.

Four indicators of the quality of aggregate may be included in the symbol for each deposit on Map 1. They are: gravel content (G or S); fines (C); oversize (O), and lithology (L).

Three of the indicators deal with grain size distribution. The "gravel content", (G or S), indicates the suitability of aggregate for various uses. Deposits containing more than 35 percent crushable gravel are considered to be favourable extractive sites, since this content is the minimum from which crushed products can be economically produced.

Exesss "fines" or high silt and clay content may severely limit the potential use of an aggregate. Fines content in excess of 10 percent may impede drainage in road sub-base aggregate and render it more susceptible to the effects of frost action. In asphalt aggregate, excess fines hinder the bonding of particles. Deposits known to have a high fine content are indicated by a "C" in the quality portion of the Deposit Symbol.

Deposits containing more than 20 percent "oversize" particles (those greater than 4 inches (10 cm) in diameter) may also have use limitations. The oversize component is unacceptable for all concrete aggregate and for road-building

aggregate, so must be either crushed or removed during processing. Deposits known to have an appreciable oversize component are indicated by an "O" in the quality portion of the Deposit Symbol.

The other indicator of the quality of an aggregate is "lithology". Just as the unique physical and chemical properties of bedrock formations determine their value for use as crushed rock, so do various lithologies of particles in a sand and gravel deposit determine its suitability for various uses. The presence of objectionable lithologies such as chert, siltstone, and shale, even in relatively small amounts, can result in a reduction in the quality of an aggregate, especially for high-quality uses. Deposits known to contain objectionable lithologies are indicated by an "L" in the quality component of the Deposit Symbol.

If the Deposit Symbol indicates either "C" "O" or "L" or any combination, the quality of the deposit is considered to be reduced for some uses of the aggregate. No attempt has been made to quantify the degree of limitation imposed. Assessment of the four indicators is made from published data, from data contained in files of the Ontario Ministry of Transportation and Communications and the Engineering and Terrain Geology Section of the Ontario Geological Survey, and from field observations. The Engineering Materials Office of the Ontario Ministry of Transportation and Communications has recently compiled a detailed assessment of aggregate suitability for selected areas in southern Ontario. This material has been consulted extensively in preparation of the inventory reports.

LOCATION AND SETTING

The location and setting of a resource area has a direct influence on its value for possible extraction. The evaluation of a deposit's setting is made on the basis of those natural and man-made features which may limit or prohibit extractive development.

First, the physical context of the deposit is considered. Deposits with some physical constraint on extractive development, such as thick overburden or high water table, are less valuable resource areas because of the difficulties involved in resource recovery. Second, permanent man-made features, such as roads, railways, powerlines, and housing developments, which are built on a deposit, may prohibit its extraction. The constraining effect of legally required setbacks surrounding such features is included in the evaluation. A quantitative assessment of these constraints can be made by measurement of their areal extent directly from the topographic maps. The area rendered unavailable by these features is shown for each resource area in Table 3.

The assessment of sand and gravel deposits and bedrock resource areas with respect to local land use and to private land ownership is an important component of the general evaluation process. These aspects of the evaluation process are not considered further in this report but readers are encouraged to discuss them with personnel of the Ontario Ministry of Natural Resources' District Office.

REGIONAL CONSIDERATIONS

In selecting sufficient areas for resource development, it is important to assess both the local and the regional resource base, and to forecast future production and demand patterns.

Some appreciation of future aggregate requirements in an area may be gained by assessing its present production levels and by forecasting future production trends. Such an approach is based on the assumptions that production levels in an area closely reflect the demand and that the present production "market share" of an area will remain at roughly the same level.

The aggregate resources in the region surrounding a municipality should be assessed in order to properly evaluate specific resource areas and to adopt optimum resource management plans. For example, a municipality that has large resources in comparison to its surrounding region constitutes a regionally significant resource area. Municipalities with high resources in proximity to large demand centres, such as metropolitan areas, are special cases.

Although an appreciation of the regional context is required to develop comprehensive resource management techniques, such detailed evaluation is beyond the scope of this report. The selection of resource areas made in this study is based primarily on geological

data or on considerations outlined in preceding sections.

MAP 3: BEDROCK RESOURCES

Map 3 is an interpretative map derived from bedrock geology, bedrock topography, drift thickness maps, water well data from the Ontario Ministry of the Environment, oil and gas well data from the Petroleum Resources Section (Ontario Ministry of Natural Resources), and from geotechnical well data from various sources. Map 3 is based on concepts similar to those outlined for Maps 1 and 2, but displays both the inventory and evaluation on the one map.

The geological boundaries of the labelled bedrock units are shown by a dashed line. Isolated outcrops are indicated by an "X". Three sets of contour lines delineate areas of less than 3 feet (1 m) of drift, areas of 3 to 25 feet (1 to 8 m) of drift, and areas of 25 to 50 feet (8 to 15 m) of drift. The extent of the areas of thin drift are shown by three tones. The darkest tone indicates areas where bedrock outcrops or is within 3 feet (1 m) of the ground surface. These areas constitute potential resource areas of primary significance due to their easy access. The medium tone indicates areas where drift cover is up to 25 feet (8 m) thick. Quarrying is possible in this depth of overburden and these also represent potential resource areas. The lightest tone indicates bedrock areas overlain by 25 to 50 feet (8 to 15 m) of overburden. These latter areas constitute resources which have extractive value only in specific circumstances. Outside of these delineated areas the bedrock can be assumed to be covered by more than 50 feet (15 m) of overburden, a depth generally considered to be too great to allow economic extraction (unless part of the overburden is composed of economically attractive sand and gravel deposits).

Other inventory information presented on Map 3 is designed to give an indication of the present level of extractive activity in the municipality. Those areas which are licenced for extraction under The Pits and Quarries Control Act, 1971 are shown by a solid outline and identified by a number which refers to the quarry descriptions in Table 5. Each description notes the owner, location, and licenced acreage of the quarry and an estimate of face height. Unlicenced quarries (abandoned quarries or wayside quarries operating under authority of a permit) are also identified and numbered on Map 3 and described in Table 5. One additional symbol appears on the map: an open dot indicates the location of a selected well which penetrates bedrock. The overburden thickness is shown in feet beside the open dot.

SELECTION CRITERIA

Criteria equivalent to those for sand and gravel deposits are used to select bedrock areas most favourable for extractive development.

The evaluation of bedrock resources is made primarily on the basis of performance and suitability data established by laboratory testing at the Ontario Ministry of Transportation and Communications. The main characteristics and use of the bedrock formations found in southern Ontario are summarized in Appendix D.

Deposit "size" is related directly to the areal extent of thin drift cover overlying favourable bedrock formations of sufficient thickness to support quarry operations. Since vertical and lateral variations in bedrock units are much more gradual than in sand and gravel deposits, the quality and quantity of the resource is usually consistent over large areas.

Quality of the aggregate derived from specific bedrock units is established by the performance standards previously mentioned. Location and setting criteria and regional considerations are identical to those for sand and gravel deposits.

SELECTED RESOURCE AREAS

Selection of bedrock resource areas has been restricted to a single level of significance. Three factors support this approach. Quality and quantity variations are gradual. The areal extent of a given quarry operation is much smaller than that of a sand and gravel pit producing an equivalent tonnage of material. Since crushed bedrock has a higher unit value than sand and gravel, longer haul distances can be considered. These factors allow the identification of alternative sites having similar development potential. The wider range of possible resource areas allows greater flexibility in locating quarry operations away from areas of intensive land use competition. The Selected Areas are shown on Map 3 by a line pattern and the calculated available tonnages are given in Table 6.

Selected Bedrock Resource Areas shown on Map 3 are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major bedrock resource is known to exist. Such a resource area may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

PART III - ASSESSMENT OF AGGREGATE RESOURCES IN THE CITY OF BURLINGTON

LOCATION AND POPULATION

The City of Burlington occupies an irregular area of 43,840 acres (17 742 ha) in the Regional Municipality of Halton, southern Ontario. The city is bounded on the north, east and south by the towns of Milton and Oakville, and Lake Ontario, respectively. To the west the city is bounded by the Regional Municipality of Hamilton-Wentworth. The present boundaries of the city were formed when Halton County was restructured to create the Regional Municipality of Halton in 1973. Burlington now comprises most of the geographic township of Nelson, as well as part of the former East Flamborough Township. The city is shown on the Hamilton-Burlington map sheet (30 M/5) of the National Topographic System at a scale of 1:50 000.

The main centre of population fringes Lake Ontario and extends north to the Queen Elizabeth Way. Other small settlements, Kilbride, Lowville and Cedar Springs, are located in the northern portion of the city. The population of the City of Burlington was 112,722 in 1980 and statistics indicate the population has increased by 23 percent since 1973 (Ontario Ministry of Intergovernmental Affairs 1981; Ontario Ministry of Treasury, Economics and Intergovernmental Affairs 1974). Recent growth has occurred in the area between King's Highway 5 and the Queen Elizabeth Way and is likely to continue in the near future. Increased local demand for supplies of natural and crushed aggregate is a direct consequence of such growth.

Access within the City of Burlington is provided by King's Highways 2, 5 and 403 and the Queen Elizabeth Way, which traverse the southern portion of the city and form part of the regional transportation network in southern Ontario. Access in the remainder of the city is provided by a grid of gravel-surfaced concession roads and paved regional roads. Rail access is provided by two lines of the Canadian National Railway. One line traverses the southern part of the city and the other runs in a north-south direction.

PHYSIOGRAPHY AND SURFICIAL GEOLOGY

The physiography and distribution of surficial material in the City of Burlington, including the sand and gravel deposits shown on Map 1, are the result of glacial activity which took place in the Late Wisconsinan Substage of the Pleistocene Epoch. This period of time, which lasted from approximately 23 000 to 10 000 years ago, was marked by the repeated advance and melting of massive, continental ice sheets.

The Niagara Escarpment dominates the local physiography of the city and greatly influenced the pattern of glaciation in the region. The Escarpment, formed by erosion over millions of years is a high bedrock scarp which trends in a north-south direction through the central part of the city. Chapman and Putnam (1966) discuss the following physiographic regions. To the west, on the upper surface of the Escarpment, several hummocky morainic ridges form part of the Horseshoe Moraines region (p. 198). To the east, below the Escarpment, is a smooth till plain partially bevelled by lacustrine action, which forms part of the Peel Plain and South Slope regions (pp. 287-296). Above the existing lake level is a complex beach and foreshore plain complex known as the Iroquois Plain (p. 324).

At the time of the maximum glacial extent much of southern Ontario, including the City of Burlington, was covered by a submass of the ice sheet known as the Ontario lobe. The ice advanced northwest out of the Lake Ontario basin and in places overtopped the Niagara Escarpment. During the advance, the ice deposited a thick layer of silty Halton Till over the bedrock surface (Karrow 1963) forming parts of the Peel Plain and South Slope physiographic regions. The till has very little value as aggregate because of the presence of excess silt and clay.

The terminal position of the ice margin is marked by the Horseshoe Moraines near the brow of the Escarpment in the western part of the city. The moraines are narrow, multiple ridges with hummocky topography and were deposited directly on the bedrock surface. They are composed predominantly of Halton Till and have very little value as aggregate.

Large volumes of sediment-laden meltwater flowed off the ice margin while the Ontario lobe stood at or just east of the Escarpment, and laid down outwash deposits south of Kilbride. These deposits constitute the only natural aggregate sources in the City of Burlington which are presently available for extraction.

Further melting of the ice margin eventually led to its retreat into the Lake Ontario basin. Meltwater became dammed against the ice margin at this time and glacial Lake Iroquois was formed in the Lake Ontario basin (Karrow 1963).

The shore of the glacial lake was parallel to the present Lake Ontario shore line at approximately the position of the Canadian National Railway line in the southern part of the city. Beach and foreshore sand deposits formed at the margin of the lake by wave action, and contain significant amounts of sand and minor gravel, which have been extensively extracted in the past. Rapid urban development throughout the area has sterilized most of the remaining resources in these deposits and it is unlikely that the remaining material will ever be utilized. Further melting of the Ontario lobe uncovered lower drainage outlets for glacial Lake Iroquois, and waters receded from this area, marking the end of glacial activity. Postglacial erosional and depositional processes have been of minor importance in modifying the physiography of the area although numerous small streams have developed an extensive drainage network on the Halton Till plain.

EXTRACTIVE ACTIVITY

The City of Burlington has relatively low possible resources of sand and gravel but has very large possible resources of crushed stone derived from the Amabel Formation and of structural clay products from the Queenston Formation. Current sand and gravel extraction in Burlington is taking place in the outwash deposits in the northern portion of the city. The Lake Iroquois beach deposits were utilized in the past near Bayview, but extraction there is no longer taking place.

Since the designation of the City of Burlington in 1971 under The Pits and Quarries Control Act, 1971, several aggregate operations have become inactive. Presently only two sources are licenced for extraction. The total area licenced in the two pits is 151.6 acres (61.4 ha).

The extraction of bedrock for crushed aggregate is concentrated in the Amabel Formation in the western part of the city. Two quarries are presently licenced under The Pits and Quarries Control Act, 1971 and have 540.0 acres (218.5 ha) available for extraction.

Three quarries are licenced for extraction in the Queenston Formation, which is a source of high-quality shale, suitable for structural clay products. The total area licenced in these three quarries is 223.5 acres (90.4 ha).

Since the designation of the Regional Municipality of Halton records have been maintained by the Cambridge District Office of the Ontario Ministry of Natural Resources, of the total annual production of all material extracted from licenced sources. The average annual production between 1978 and 1980 for the City of Burlington has been 2.7 million tons (2.4 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREAS

Two gravel outwash deposits have been selected as Resource Areas of Primary Significance. Three lacustrine sand plain deposits have been selected as Sand and Gravel Resource Areas of Secondary Significance.

The Selected Sand and Gravel Resource Areas of Primary Significance occupy an available area of 385 acres (156 ha), exclusive of licenced properties, and have possible resources of 24 million tons (22 million tonnes). The Selected Areas represent four percent of the total area of sand and gravel in the city and nine percent of the total resource tonnage. It is important to note that the availability of possible resources in the Selected Sand and Gravel Resource Areas may be constrained by designations set through the Niagara Escarpment Planning exercise.

SELECTED SAND AND GRAVEL RESOURCE AREA 1

Selected Sand and Gravel Resource Area 1, located in the northwestern corner of the city is the most significant aggregate source. Selected Area 1 is an outwash deposit developed in a glacial meltwater channel that formed at the edge of the Niagara Escarpment, south of Kilbride. One pit (pit no. 1) presently licenced for extraction exposes 20 to 25 feet (6 to 8 m) of material which has been used for asphaltic sand, some crushed aggregate and sub-base aggregate such as Granular Base Course (G.B.C.) B and C, with minor amounts of G.B.C. A. A second pit licenced to Salco Construction

(pit no. 2) lies just outside the Area and contains aggregate suited for use as fill. The presence of a high percentage of Queenston shale fragments in the deposit limits the potential uses of the aggregate.

Resource Area 1 has a total area of 970 acres (395 ha), exclusive of licenced properties. Extensive residential and commercial development at Kilbride and Cedar Springs has made much of the aggregate unavailable for extraction. It is estimated that only 365 acres (148 ha) are presently available. Assuming an average thickness of 25 feet (8 m), possible resources of sand and gravel are estimated to be 23 million tons (21 million tonnes). Consideration should be given to the protection of those portions of Resource Area 1 that still remain available for extraction.

SELECTED SAND AND GRAVEL RESOURCE AREA 2

Selected Sand and Gravel Resource Area 2 is a small outwash deposit at the northern boundary of the city. It is the southern tip of a large outwash deposit selected for resource protection in the Town of Milton. It has an available area of 20 acres (8 ha), and an average thickness of 20 feet (6 m), based on pit exposures in neighbouring Milton. Possible resources in the Area are thus 1 million tons (1 million tonnes) of sand and crushable gravel.

SAND AND GRAVEL RESOURCE AREAS OF SECONDARY SIGNIFICANCE

Three lacustrine plain deposits in the northwestern portion of the city have been selected at the secondary level. The deposits are capable of supplying low-specification aggregate products, such as fill, for local use.

BEDROCK GEOLOGY

Bedrock underlying the City of Burlington consists of Ordovician shale east of the Escarpment, and Silurian dolostone west of the Escarpment. The Escarpment face exposes a complex succession of shale, sandstone, limestone and dolostone of the Clinton and Cataract Groups. The distribution of the bedrock formations has been shown on Map 3 after Liberty et al. (1976).

Red shale of the Queenston Formation underlies most of the city except for an area along the western boundary. The formation has a thickness of up to 600 feet (183 m) in this region (Guillet 1977), however extraction has taken place only to a depth of 50 feet (15 m) (Table 5). Most of the bedrock surface has a thin drift cover of less than 25 feet (8 m), which consists predominantly of Halton Till. There are extensive areas in the southern part of the city where bedrock is at the surface. The proximity of the bedrock to the surface has allowed groundwater to leach deleterious elements (such as lime and gypsum) from the rock, thus improving its suitability for structural clay products. Queenston shale and unconsolidated clay derived from erosion of the formation in this area are amongst the best ceramic clays in Ontario for the manufacture of structural clay products (Guillet 1967; 1977).

Three shale pits licenced for extraction of the Queenston Formation (quarry nos. 3, 4 and 5) have a total area of 223.5 acres (90.4 ha). The shale and clay from these sources are used in the production of both brick and tile. Only three small areas have been identified and selected for resource protection because of the extensive urban development which has taken place in areas of outcrop. Pits might be established in any of the localities and consideration should be given to protecting parts of the resource areas for possible extractive development. In addition consideration should be given to all areas of the Queenston which are overlain by less than 25 feet (8 m) of drift. Although not specifically selected for protection, these areas present suitable alternate sites for extraction if the Selected Areas become unavailable as a result of urban development.

A succession of several formations which make up the Clinton and Cataract Groups overlies the Queenston Formation and forms the face of the Niagara Escarpment. The two groups generally have restricted lateral extent and the only area where they are available for possible extraction is in a small area south of Kilbride. A few of the formations have been utilized in the past for a variety of construction products, the most important being sandstone of the Whirlpool Formation which is quarried for building stone. Because the Clinton and Cataract Groups have such limited extent in the City of Burlington, no areas have been selected for possible resource protection.

The brow and upper surface of the Niagara Escarpment are formed by the tough, erosion-resistant Amabel Formation which occurs at the western boundary of the city. It consists of medium-crystalline, fossiliferous, medium- to massive-bedded dolostone (Liberty et al. 1976) and is well suited for the production of high-quality road-building and construction aggregate. The Amabel is covered by less than 25 feet (8 m) of drift throughout most of its occurrence in Burlington, and has a quarriable thickness of approximately 60 feet (18 m) in this area. The entire extent of the formation covered by less than 25 feet (8 m) of drift has been selected for possible resource protection.

SELECTED BEDROCK RESOURCE AREAS

The Amabel Formation and Queenston Formation have been selected for possible resource protection. Three Areas of the Queenston Formation have been selected for possible resource protection. However, much of the three Areas may be unavailable for extraction because of existing or planned development. Since the Queenston shale in this region is of such high quality (Guillet 1977), it is recommended that resource protection measures be considered for all areas of the Queenston Formation overlain by less than 25 feet (8 m) of overburden (Map 3).

It is important to note that the availability of possible resources in the Selected Bedrock Resource Areas may be constrained by designations set through the Niagara Escarpment Planning exercise.

SELECTED BEDROCK RESOURCE AREA 1

Selected Bedrock Resource Area 1 consists of the entire extent of the Amabel Formation where drift cover is less than 25 feet (8 m) thick, extending from the Escarpment to the western boundary of the city.

The Area has been identified by Vos (1969) as an area of potential quarry development on the basis of drift thickness, and material quality and proximity to markets. The licenced quarries (quarry nos. 1 and 2) located in the centre of the Resource Area are operated by King Paving and Materials Ltd. The extractive operation here is one of the largest in Ontario. Vos (1969, p. 36) notes that: "In the quarry face some 50 to 70 feet (15 to 21 m) of Amabel dolomite are exposed overlying the Reynales Formation. The upper 30 to 50 feet (9 to 15 m) is massive and reefy dolomite showing reef mounds 100 to 300 feet (30 to 91 m) wide and 20 to 50 feet (6 to 15 m) high. The dolomite is porous, hard and fossiliferous. Below this reefy dolomite another 14.5 feet (4.4 m) of medium-bedded Amabel dolomite is present." Other quarries, now long abandoned, have been operated in the Amabel Formation at Mount Nemo and east of Waterdown (quarry nos. Q6 and Q7). Generally, the Amabel in this Resource Area is hard and durable and has been used for the production of road-base course, asphaltic and concrete aggregate. The Amabel is considered to be a resource of provincial significance for crushed aggregate products.

Selected Bedrock Resource Area 1 has a total area of 6100 acres (2470 ha), excluding licenced quarries, of which approximately 3700 acres (1500 ha) are presently available for extraction. Assuming an average workable thickness of 60 feet (18 m), possible crushed stone resources are estimated to be 800 million tons (730 million tonnes).

The Area is sparsely populated and most of the land is cleared for agriculture. The till overburden should pose few stripping problems although the reefal parts of the Amabel have a highly irregular bedrock surface which may hinder stripping operations (Vos 1969). Road access is provided by local gravel-surfaced roads and paved regional roads. These routes provide ready access to the main transport network in the southern part of the city. Rail access is provided by a line of the Canadian Pacific Railway which runs through Flamboro and Waterdown, west of the Resource Area.

SELECTED BEDROCK RESOURCE AREAS 2, 3 AND 4

Three Areas in the Queenston Formation covered by thin drift have been selected for resource protection. The Queenston Formation is an important source of high-quality clay and shale for the manufacture of structural clay products. Therefore it is important to protect what resources remain before these areas are sterilized by urbanization.

Selected Resource Area 2 lies along Bronte Creek in the eastern part of the city. Presently the Canada Brick Co. Ltd. has a licenced pro-

perty of 39.5 acres (16.0 ha) in this Area. There are 90 acres (36 ha) available for extraction and assuming a workable thickness of 60 feet (18 m), possible resources of 17 million tons (15 million tonnes).

Selected Resource Area 3 has 150 acres (61 ha) available for extraction and assuming a workable thickness of 60 feet (18 m), possible resources of 29 million tons (26 million tonnes).

Two existing shale pits are found adjacent to Selected Resource Area 4. The two pits have a total licenced acreage of 179.0 acres (72.4 ha). There are an estimated 105 acres (42 ha) available for extraction in the Area and assuming a workable thickness of 60 feet (18 m), possible resources of 20 million tons (18 million tonnes).

All three Areas have easy access to King's Highway 5 and 403, the Queen Elizabeth Way and two lines of the Canadian National Railway.

Again, since the Queenston shale is of such high quality, it is recommended that all areas of the formation covered by less than 25 feet (8 m) of drift be considered for resource protection.

SUMMARY

The City of Burlington has low possible resources of sand and gravel and may not be able to supply local needs in the near future. Two deposits have been selected for possible resource protection at the primary level. Care should be taken to ensure the continuing availability of as much of these Resource Areas as possible.

Possible resources of crushed stone derived from the Amabel Formation are very large, and most of the Amabel bedrock in the city has been selected for possible resource protection. Several areas in the Queenston Formation have been selected for resource protection as a source of high-quality clay and shale for the manufacture of structural clay products.

It is important to note that the availability of possible resources in both the Selected Sand and Gravel Resource Areas and the Selected Bedrock Resource Areas may be constrained by designations set through the Niagara Escarpment Planning exercise.

Enquiries regarding the Aggregate Resources Inventory for the City of Burlington should be directed to the Ontario Ministry of Natural Resources either at the Cambridge District Office, Box 2186, Cambridge, Ontario, N3C 2W1, Tel. (519) 658-9356 or to the Central Region Office, 10670 Yonge Street, Richmond Hill, Ontario, L4C 3C9, Tel. (416) 884-9203.

TABLE 1 | TOTAL SAND AND GRAVEL RESOURCES, CITY OF BURLINGTON

1 CLASS NO.	2 DEPOSIT TYPE (see Appendix C)	3 AREAL EXTENT Acres (Hectares)	4 ORIGINAL TONNAGE Millions of Tons (Tonnes)
1	G-K	25 (10)	1 (1)
	S-LP	255 (103)	13 (12)
	G-OW	1220 (495)	76 (69)
2	G-LB	275 (111)	10 (9)
	S-LP	110 (44)	4 (4)
3	S-LP	8800 (3550)	176 (160)
		10,700 (4350)	280 (255)

N.B. Minor variations in above table are due to rounding of data.

TABLE 2 | SAND AND GRAVEL PITS, CITY OF BURLINGTON

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREAS Acres (Hectares)	7 FACE HEIGHT Feet (Metres)	8 % GRAVEL
LICENCED PITS							
1	H3-49	King Paving & Materials	8	1	100.0 (40.5)	20-25 (6-8)	35-40
2	H3-33	Salco Construction Sand and Gravel Ltd.	8	2	51.6 (20.9)	25 (8)	<5
					151.6 (61.4)		

TABLE 3 | SELECTED SAND AND GRAVEL RESOURCE AREAS, CITY OF BURLINGTON

1 DEPOSIT NO.	2 UNLICENCED AREA Acres (Hectares)	3 CULTURAL SETBACKS Acres (Hectares)	4 EXTRACTED AREA Acres (Hectares)	5 AVAILABLE AREA Acres (Hectares)	6 ESTIMATED DEPOSIT THICKNESS Feet (Metres)	7 AVAILABLE AGGREGATE Millions of Tons (Tonnes)
1	970 (395)	600 (243)	3 (1)	365 (148)	25 (8)	23 (21)
2	55 (22)	15 (	20 (8)	20 (8)	20 (6)	1 (1)
	1020 (415)	620 (250)	23 (9)	385 (156)		24 (22)

N.B. Minor variations in above table are due to rounding of data.

TABLE 4 | TOTAL IDENTIFIED BEDROCK RESOURCES, CITY OF BURLINGTON

1 DRIFT THICKNESS Feet (Metres)	2 FORMATION	3 ESTIMATED DEPOSIT THICKNESS Feet (Metres)	4 AREAL EXTENT Acres (Hectares)	5 ORIGINAL TONNAGE Millions of Tons (Tonnes)
0-3 (0-1)	Amabel Formation	60 (18)	320 (130)	69 (63)
3-25 (1-8)		60 (18)	5800 (2350)	1250 (1130)
25-50 (8-15)		60 (18)	425 (172)	92 (84)
			6500 (2650)	1410 (1280)
0-3 (0-1)	Clinton and Cataract Groups	60 (18)	470 (190)	90 (82)
3-25 (1-8)		60 (18)	1240 (500)	238 (216)
25-50 (8-15)		60 (18)	500 (202)	96 (87)
			2210 (890)	425 (385)
0-3 (0-1)	Queenston Formation	60 (18)	1610 (650)	310 (280)
3-25 (1-8)		60 (18)	14,900 (6000)	2850 (2600)
25-50 (8-15)		60 (18)	7300 (2950)	1400 (1270)
			23,800 (9600)	4550 (4150)
			32,500 (13 200)	6400 (5800)

N.B. Minor variations in above table are due to rounding of data.

TABLE 5 | QUARRIES, CITY OF BURLINGTON

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREA Acres (Hectares)	7 FACE HEIGHT Feet (Metres)
LICENCED QUARRIES						
1	H3-22	King Paving & Materials	2. W½ 1 E½ 1 & 2	3 NS 2	500.0 (202.4)	60 (18)
2	–	King Paving & Materials	Pt. 1	3 NS	40.0 (16.2)	60 (18)
3	–	Canada Brick Co. Ltd.	3	1 NDS	39.5 (16.0)	45 (14)
4	H3-17	National Sewer Pipe Ltd.	Pt. 2, 3 Pt. 1, 2, 3	1 2	179.0 (72.4)	30 (9)
5	–	Halton Ceramics Ltd.	Pt. 11 & 12	1	5.0 (2.0)	50 (15)
					763.5 (309.0)	
UNLICENCED QUARRIES*						
6	–	Old Nelson Quarry	24	1 SDS		40 (12)
7	–	Bay Crushed Stone	2	4		70 (21)

*Abandoned quarries or wayside quarries operating on demand under authority of a permit.

TABLE 6 | SELECTED BEDROCK RESOURCE AREAS, CITY OF BURLINGTON

1 DEPOSIT NO.	2 DEPTH OF OVERBURDEN Feet (Metres)	3 UNLICENCED AREA Acres (Hectares)	4 CULTURAL SETBACKS Acres (Hectares)	5 EXTRACTED AREA Acres (Hectares)	6 AVAILABLE AREA Acres (Hectares)	7 ESTIMATED WORKABLE THICKNESS Feet (Metres)	8 AVAILABLE RESOURCES Millions of Tons (Tonnes)
1	Amabel Formation 0-25 (0-8)	6100 (2470)	2400 (970)	5 (2)	3700 (1500)	60 (18)	800 (730)
2	Queenston Formation 0-3 (0-1)	345 (140)	255 (103)	0 (0)	90 (36)	60 (18)	17 (15)
3	Queenston Formation 0-3 (0-1)	600 (243)	450 (182)	0 (0)	150 (61)	60 (18)	29 (26)
4	Queenston Formation 0-25 (0-8)	190 (77)	75 (30)	10 (4)	105 (42)	60 (18)	20 (18)
		7200 (2900)	3200 (1300)	15 (6)	4050 (1640)		870 (790)

N.B. Minor variations in above table are due to rounding of data.

REFERENCES

Association of Professional Engineers of Ontario
1976: Performance Standards for Professional Engineers Advising on and Reporting on Oil, Gas and Mineral Properties; Association of Professional Engineers of Ontario, 11 p.

Chapman, L. J. and Putnam, D.F.
1966: The Physiography of Southern Ontario; Second Edition, Ontario Research Foundation, University of Toronto Press, 386 p.

Guillet, G.R.
1967: The Clay Products Industry of Ontario; Ontario Department of Mines, Industrial Mineral Report 22, 206 p.
1977: Clay and Shale Deposits of Ontario; Ontario Geological Survey, Mineral Deposits Circular 15, 117 p.

Hewitt, D.F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Circular 5, 177 p.

Karrow, P.F.
1963: Pleistocene Geology of the Hamilton-Galt Area, Southern Ontario; Ontario Department of Mines, Geological Report 16, 68 p. Accompanied by Maps 2029, 2030, 2033 and 2034, scale 1:63 360.

Liberty, B.A.; Bond, I.J. and Telford, P.G.
1976: Paleozoic Geology of the Hamilton Area, Southern Ontario; Ontario Division of Mines, Colour Map 2336, scale 1:50 000.

Ontario
1981: The Pits and Quarries Control Act, 1971; Revised Statutes of Ontario, 1980, Chapter 378, Queen's Printer for Ontario.

Ontario Interministerial Committee on National Standards and Specifications (Metric Committee)
1975: Metric Practice Guide; 67 p.

Ontario Ministry of Intergovernmental Affairs
1981: Municipal Directory 1981; Queen's Printer for Ontario, 191 p.

Ontario Ministry of Natural Resources
1980: Statistics 1980; Ontario Ministry of Natural Resources, 122 p.

Ontario Ministry of Treasury, Economics and Intergovernmental Affairs
1974: Municipal Directory 1974; Queen's Printer for Ontario, 128 p.

Robertson, J.A.
1975: Mineral Deposit Studies Mineral Potential Evaluation and Regional Planning in Ontario; Ontario Division of Mines, Miscellaneous Paper 61, 42 p.

Vos, M.A.
1969: Stone Resources of the Niagara Escarpment; Ontario Department of Mines, Industrial Mineral Report 31, 68 p.

APPENDIX A - SUGGESTED ADDITIONAL READING

American Geological Institute
1972: Glossary of Geology; Washington, D.C., 858 p.

Bauer, A.M.
1970: A Guide to Site Development and Rehabilitation of Pits and Quarries; Ontario Department of Mines and Northern Affairs, Industrial Mineral Report 33, 62 p.

Cowan, W.R.
1977: Towards the Inventory of Ontario's Mineral Aggregates; Ontario Geological Survey, Miscellaneous Paper 73, 19 p.

Fairbridge, R.W. (ed.)
1968: The Encyclopedia of Geomorphology; Encyclopedia of Earth Sciences, Vol. III, Reinhold Book Corp., N.Y., 1295 p.

Flint, R.F.
1971: Glacial and Quaternary Geology; John Wiley and Sons Inc., 892 p.

Hewitt, D.F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Report 5, 177 p.
1964a: Building Stones of Ontario, Part I Introduction; Ontario Department of Mines, Industrial Mineral Report 14, 43 p.
1964b: Building Stones of Ontario, Part II Limestone; Ontario Department of Mines, Industrial Mineral Report 15, 41 p.
1964c: Building Stones of Ontario, Part III Marble; Ontario Department of Mines, Industrial Mineral Report 16, 89 p.
1964d: Building Stones of Ontario, Part IV Sandstone; Ontario Department of Mines, Industrial Mineral Report 17, 57 p.
1972: Paleozoic Geology of Southern Ontario; Ontario Division of Mines, Geological Report 105, 18 p.

Hewitt, D.F. and Karrow, P.F.
1963: Sand and Gravel in Southern Ontario; Ontario Department of Mines, Industrial Mineral Report 11, 151 p.

Hewitt, D.F. and Vos, M.A.
1970: Urbanization and Rehabilitation of Pits and Quarries; Ontario Department of Mines, Industrial Mineral Report 34, 21 p.

Lowe, S.B.
1980: Trees and Shrubs for the Improvement and Rehabilitation of Pits and Quarries in Ontario; Ministry of Natural Resources, 71 pg.

McLellan, A.G.; Yundt, S.E. and Dorfman, M.L.
1979: Abandoned Pits and Quarries in Ontario; Ontario Geological Survey, Ministry of Natural Resources, Miscellaneous Paper 79, 36 pg.

Ontario Mineral Aggregate Working Party
1977: A Policy for Mineral Aggregate Resource Management in Ontario; Ontario Ministry of Natural Resources, 232 p.

Ontario Ministry of Natural Resources
1975: Vegetation for the Rehabilitation of Pits and Quarries; Forest Management Branch Division of Forests, 38 p.

Peat, Marwick & Partners and
M.M. Dillon Limited
1981: Mineral Aggregate Transportation Study; Industrial Minerals Background Paper 1, 133 pg. Summary Report 26 pg.

Proctor and Redfern Ltd.
1974: Mineral Aggregate Study, Central Ontario Planning Region; Prepared for the Ontario Ministry of Natural Resources, over 100 p.

Proctor and Redfern Ltd., and Gartner Lee Associates Ltd.
1975: Mineral Aggregate Study of Part of The Eastern Ontario Region; Prepared for the Ontario Ministry of Natural Resources, about 200 p.

1977: Mineral Aggregate Study and Geological Inventory, Southwestern Region of Ontario; Prepared for the Ontario Ministry of Natural Resources, about 200 p.

APPENDIX B - GLOSSARY

ABRASION RESISTANCE

Tests such as the Los Angeles Abrasion Test are used to measure the ability of aggregate to resist crushing and pulverizing under conditions similar to those encountered in processing and use. Measuring resistance is an important component in the evaluation of the quality and prospective uses of aggregate. Hard, durable material is preferred for road building.

ABSORPTION CAPACITY

Related to the porosity of the rock types of which an aggregate is composed. Porous rocks are subject to disintegration when absorbed liquids freeze and thaw, thus decreasing the strength of the aggregate.

AGGREGATE

Any hard, inert, construction material (sand, gravel, shells, slag, crushed stone or other mineral material) used for mixing in various sized fragments with a cement or bituminous material to form concrete, mortar, etc., or used alone for road building or other construction. Synonyms include mineral aggregate and granular material.

CAMBRIAN

The first Period of the Paleozoic Era, thought to have covered the time between 570 and 500 million years ago; the Cambrian precedes the Ordovician Period.

CLAST

An individual constituent, grain, or fragment of a sediment or rock, produced by the mechanical weathering of a large rock mass. Synonyms include particle and fragment.

DELETERIOUS LITHOLOGY

A general term used to designate those rock types which are chemically or physically unsuited for use as construction or road-building aggregates. Such lithologies as chert, shale, siltstone, and sandstone may deteriorate rapidly when exposed to traffic and other environmental conditions.

DEVONIAN

A Period of the geological past thought to have covered the span of time between 395 and 345 million years ago, following the Silurian Period. Rocks formed in the Devonian Period are among the youngest found in Ontario.

DIRT

See fines.

DOLOSTONE

A carbonate sedimentary rock consisting chiefly of the mineral dolomite and containing relatively little calcite (dolostone is also known as dolomite).

DRIFT

A general term for all unconsolidated rock debris transported from one place and deposited in another; distinguished from underlying bedrock. In North America, glacial activity has been the dominant mode of transport and deposition of drift. Synonyms include overburden and surficial deposit.

DRUMLIN

A low, smoothly rounded, elongated hill, mound, or ridge composed of glacial materials. These landforms were deposited beneath an advancing ice sheet, and were shaped by its flow.

EOLIAN

Pertaining to the wind, especially with respect to landforms whose constituents were transported and deposited by wind activity. Sand dunes are an example of an eolian landform.

FINES

A general term used to describe the size fraction of an aggregate which passes (is finer than) the No. 200 mesh screen (0.074 mm). Also described informally as "dirt", these particles are in the silt- and clay-size range.

GLACIAL LOBE

A tongue-like projection from the margin of the main mass of an ice cap or ice sheet. During the Pleistocene Epoch several lobes of the Laurentide continental ice sheet occupied the Great Lakes basins. These lobes advanced and retreated numerous times during the Pleistocene, producing the complex arrangement of glacial material and landforms found in southern Ontario.

GRADATION

The proportion of material of each particle size or the frequency distribution of the various sizes which constitute a sediment. The strength, durability, permeability and stability of an aggregate depend to a great extent on its gradation. The size limits for different particles are as follows:

Boulder		>-256 mm
Gravel	cobble	64-256 mm
Gravel	pebble	4-64 mm
Gravel	granule	2-4 mm
Sand	coarse	.5-2 mm
	medium	.25-.5 mm
	fine	.074-.25 mm
Silt, clay		<.074 mm

GRANULAR BASE COURSE

Components of the pavement structure of a road, which are placed on the subgrade and are designed to provide strength, stability, and drainage, as well as support for surfacing materials. Several types have been defined: Granular Base Course A consists of crushed and processed aggregate and has relatively stringent quality standards in comparison to Granular Base Course B and C which are usually pit-run or other unprocessed aggregate.

H.L. (HOT-LAID OR ASPHALTIC AGGREGATE)

Bituminous, cemented aggregates used in the construction of pavements either as surface or bearing course (H.L. 1, 3, and 4), or as binder course (H.L. 2, 6, and 8) used to bind the surface course to the underlying granular base course.

LITHOLOGY

The description of rocks on the basis of such characteristics as color, structure, mineralogic composition, and grain size. Generally, the description of the physical character of a rock.

MELTWATER CHANNEL

A drainage way, usually terraced, produced by water flowing away from a melting glacier margin.

ORDOVICIAN

An early peiod of the Paleozoic Era thought to have covered the span of time between 500 and 435 million years ago.

PALEOZOIC ERA

One of the major divisions of the geologic time scale thought to have covered the time between 570 and 230 million years ago. The Paleozoic Era (or Ancient Life Era) is subdivided into six geologic Periods, of which only four (Cambrian, Ordovician, Silurian, and Devonian) can be recognized in southern Ontario.

PLEISTOCENE

An Epoch of the recent geological past including the time from approximately 1.8 million years ago to 7000 years ago. Much of the Pleistocene was characterized by extensive glacial activity.

POSSIBLE RESOURCE

Estimates of mineral aggregate material based largely on broad knowledge of the geologic character of the deposit and for which there are few, if any, samples of measurements. The estimates are based on assumed continuity or repetition for which there are reasonable geological indications.

SHALE

A fine-grained, sedimentary rock formed by the consolidation of clay, silt, or mud and characterized by well developed bedding planes, along which the rock breaks readily into thin layers. The term shale is also commonly used for fissile claystone, siltstone, and mudstone.

SILURIAN

An early Period of the Paleozoic Era thought to have covered the time between 435 and 395 million years ago. The Silurian follows the Ordovician Period and precedes the Devonian Period.

SOUNDNESS

The ability of the components of an aggregate to withstand the effects of various weathering processes and agents. Unsound lithologies are subject to disintegration caused by the expansion of absorbed solutions. This may seriously impair the performance of road-building and construction aggregates.

TILL

Unsorted and unstratified rock debris, deposited directly by glaciers, and ranging in size from clay to large boulders.

WISCONSINAN

Pertaining to the last glacial stage of the Pleistocene Epoch in North America. It began approximately 100 000 years ago and ended approximately 7000 years ago. The glacial deposits and landforms of southern Ontario are predominantly the result of glacial activity during the Winsconsinan Stage.

APPENDIX C - GEOLOGY OF SAND AND GRAVEL DEPOSITS

The type, distribution, and extent of sand and gravel deposits in southern Ontario are the result of extensive glacial and glacially influenced activity in Wisconsinan time during the Pleistocene Epoch, approximately 7000 to 85 000 years ago. The deposit types reflect the different depositional environments that existed during the melting and retreat of the continental ice masses, and they can readily be differentiated on the basis of their morphology, structure, and texture. The deposit types are described below.

GLACIOFLUVIAL DEPOSITS

These deposits can be divided into two broad categories: those that were formed in contact with (or in close proximity to) glacial ice, and those that were deposited by meltwaters carrying materials beyond the ice margin.

ICE-CONTACT TERRACES (ICT)

These are glaciofluvial features deposited between the glacial margin and a confining topographic high, such as the side of a valley. The structure of the deposits may be similar to that of outwash deposits, but in most cases the sorting and grading of the material is more variable and the bedding is discontinuous due to extensive slumping. The probability of locating large amounts of crushable aggregate is moderate, and extraction may be expensive due to the variability of the deposits both in terms of quality and grain-size distribution.

KAMES (K)

Kames are defined as mounds of poorly sorted sand and gravel deposited by meltwater in depressions or fissures on the ice surface or at its margin. During glacial retreat, the melting of supporting ice causes collapse of the deposits producing internal structures characterized by bedding discontinuities. The deposits consist mainly of irregularly bedded and cross-bedded, poorly sorted sand and gravel. The present forms of the deposits include single mounds, linear ridges (crevasse fillings) or complex groups of landforms. The latter are occasionally described as "undifferentiated ice-contact stratified drift" (IC) when detailed subsurface information is unavailable. Since kames commonly contain large amounts of fine-grained material and are characterized by considerable variability, there is generally a low to moderate probability of discovering large amounts of good-quality, crushable aggregate. Extractive problems encountered in these deposits are mainly the excessive variability of the aggregate and the presence of excess fines (silt- and clay-sized particles).

ESKERS (E)

Eskers are narrow, sinuous ridges of sand and gravel deposited by meltwaters flowing in tunnels within or at the base of glaciers, or in channels on the ice surface. They vary greatly in size. Many, though not all eskers consist of a central core of poorly sorted and stratified gravel characterized by a wide range in grain size. The core material is often draped on its flanks by better sorted and stratified sand and gravel. The deposits have a high probability of containing a large proportion of crushable aggregate, and since they are generally built above the surrounding ground surface, are convenient extraction sites. For these reasons esker deposits have been traditional aggregate sources throughout southern Ontario, and are significant components of the total resources of many areas.

Some planning constraints and opportunities are inherent in the nature of the deposits. Because of their linear nature, the deposits commonly extend across several property boundaries leading to unorganized extractive development at numerous small pits. On the other hand, because of their form, eskers can be easily and inexpensively extracted and are amenable to rehabilitation and sequential land use.

UNDIFFERENTIATED ICE-CONTACT STRATIFIED DRIFT (IC)

This designation may include deposits from several ice-contact, depositional environments which usually form extensive, complex landforms. It is not feasible to identify individual areas of coarse-grained material within such deposits due to their lack of continuity and grain-size variability. They are given a qualita-

tive rating based on existing pit and other subsurface data.

OUTWASH (OW)

Outwash deposits consist of sand and gravel laid down by meltwaters beyond the margin of the ice lobes. They occur as sheets or as terraced valley fills (valley trains) and may be very large in extent and thickness. Well developed outwash deposits have good horizontal bedding and are uniform in grain-size distribution. Outwash deposited near the glacier's margin is much more variable in texture and structure. The probability of locating useful crushable aggregates in outwash deposits is moderate to high depending on how much information on size, distribution and thickness is available.

ALLUVIUM (AL)

Alluvium is a general term for clay, silt, sand, gravel, or similar unconsolidated material deposited during postglacial time by a stream as sorted or semi-sorted sediment, on its bed or on its floodplain. The probability of locating large amount of crushable aggregate in alluvial deposits in low, and it has generally low value due to the presence of excess silt- and clay-sized material. There are no large postglacial alluvium deposits in Ontario.

GLACIOLACUSTRINE DEPOSITS

GLACIOLACUSTRINE BEACH DEPOSITS (LB)

These are relatively narrow, linear features formed by wave action at the shores of glacial lakes that existed at various times during the deglaciation of southern Ontario. Well developed lacustrine beaches are usually less than 20 feet (6 m) thick. The aggregate is well sorted and stratified and sand-sized material commonly predominates. The composition and size distribution of the deposit depends on the nature of the underlying material. The probability of obtaining crushable aggregate is high when the material is developed from coarse-grained materials such as a stony till, and low when developed from fine-grained materials. Beaches are relatively narrow, linear deposits, so that extractive operations are often numerous and extensive.

GLACIOLACUSTRINE DELTAS (LD)

These features were formed where streams or rivers of glacial meltwater flowed into lakes and deposited their suspended sediment. In southern Ontario such deposits tend to consist mainly of sand and abundant silt. However, in near-ice and ice-contact positions, coarse material may be present. Although deltaic deposits may be large, the probability of obtaining coarse material is generally low.

GLACIOLACUSTRINE PLAIN (LP)

The nearly level surface marking the floor of an extinct glacial lake. The sediments which form the plain are predominantly fine to medium sand, silt, and clay, and were deposited in relatively deep water. Lacustrine deposits are generally of low value as aggregate sources due to their fine grain size and lack of crushable material. In some aggregate-poor areas, lacustrine deposits may constitute valuable sources of fill and some granular base course aggregate.

GLACIAL DEPOSITS

END MORAINES (EM)

These are belts of glacial drift deposited at, and parallel to, glacier margins. They commonly consist of ice-contact stratified drift and in such instances are usually called kame moraines. Kame moraines commonly result from deposition between two glacial lobes (interlobate moraines). The probability of locating aggregates within such features is moderate to low. Exploration and development costs are high. Moraines may be very large and contain vast aggregate resources, but the location of the best resource areas within the moraine is usually poorly defined.

EOLIAN DEPOSITS

WINDBLOWN FORMS (WD)

Windblown deposits are those formed by the transport and deposition of sand by winds. The form of the deposits ranges from extensive, thin layers to well developed linear and crescentic ridges known as dunes. Most windblown deposits in southern Ontario are derived from,

and deposited on, pre-existing lacustrine sand plain deposits. Windblown sediments are almost invariably composed of fine to coarse sand and are usually well sorted. The probability of locating crushable aggregate in windblown deposits is very low.

APPENDIX D - GEOLOGY OF BEDROCK DEPOSITS

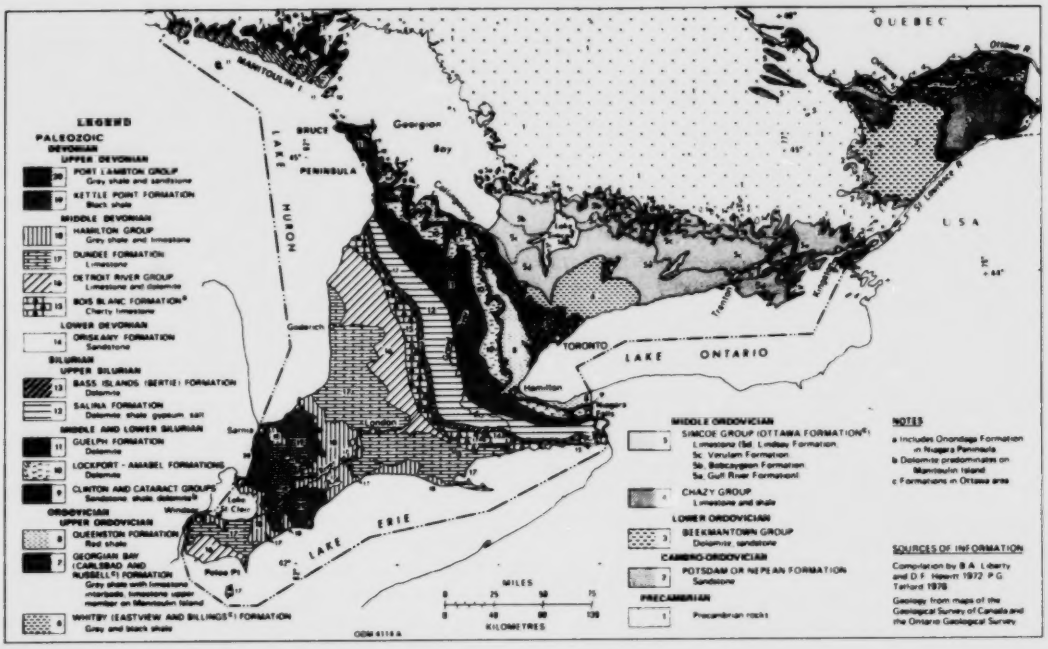

Figure 2 - Bedrock Geology of Southern Ontario

BEDROCK SUITABLE FOR CRUSHED STONE PRODUCTS

BASS ISLANDS FORMATION (UPPER SILURIAN)

(Includes the Bertie Formation of the Niagara Peninsula) Composition: Medium- to massive-bedded, aphanitic, brown dolostone with shaly partings. Thickness: 35 to 60 feet (11-18m) near Hagersville. Uses: Quarried for crushed stone on the Niagara Peninsula at Fort Erie, Cayuga, Hagersville, and Dunville. Los Angeles Abrasion Test: 17-35% loss; Absorption: 1.4%. Shaly parts are unsuitable for aggregate due to high soundness losses.

BOBCAYGEON FORMATION (MIDDLE ORDOVICIAN)

Composition: Compact, homogeneous, medium- to thin-bedded, fine-grained limestone with some argillaceous and shaly partings. Thickness: The lower unit is 40 to 72 feet (12 to 22 m) thick in the east and the remainder of the formation is 40 feet (12 m). Uses: Quarried at Kirkfield and Marysville for crushed stone. The Bobcaygeon Formation has consistently acceptable quality for granular base course materials and concrete.

BOIS BLANC FORMATION (LOWER-MIDDLE DEVONIAN)

Composition: Brownish grey, medium-crystalline, medium- to thin-bedded, cherty limestone, commonly fossiliferous. Limestone may be silty or sandy in places. Thickness: 9 to 200 feet (3 to 61 m). Uses: Quarried at Hagersville, Cayuga, and Port Colborne for crushed stone. High chert content makes much of the material unsuitable for concrete aggregate. Los Angeles Abrasion

Test: 14-28% loss; Soundness Test: 4-10% loss; Absorption: 0.7-2.0%.

DUNDEE FORMATION (MIDDLE DEVONIAN)

Composition: Fine- to medium-crystalline, brownish grey, medium- to thick-bedded, dolomitic limestone with shaly partings, sandy layers, and chert in some areas. Thickness: 60 to 160 feet (18 to 49 m). Uses: Quarried near Port Dover and Pelee Island for crushed stone. Used at St. Marys for portland cement. Los Angeles Abrasion Test: 22-32% loss; Absorption: 0-4%.

GULL RIVER FORMATION (MIDDLE ORDOVICIAN)

Composition: Member A: thin- to thick-bedded, interbedded, grey argillaceous limestone and buff to green dolostone with a maximum thickness of 60 feet (18 m). Members B and C are dense, aphanitic limestones with argillaceous dolostone interbeds. Uses: Quarried at Kirkfield, Victoria County, and Uthoff for crushed stone. The product is generally fresh and compact with good cubic-shaped factor, low clay content, low absorption, and low soundness losses. Smooth particle surfaces may cause adhesion problems for asphalt. There is some alkali reactivity in a few of the layers.

LOCKPORT AND AMABEL FORMATIONS (MIDDLE SILURIAN)

Composition: Amabel Formation (Waterdown to the Bruce Peninsula): massive, fine crystalline dolostone, with reef facies dolostone near Georgetown. Lockport Formation (lateral facies equivalent to the Amabel Formation from Watertown to Niagara Falls): thin- to massive-bedded, fine- to medium-grained dolostone. Thickness: Amabel Formation: maximum observed thickness of 84 feet (26 m). Lockport Formation: up to 130 feet (40 m). Uses: The Lockport and Amabel Formations have been used to produce lime, crushed stone, and building stone throughout their area of occurrence, and are a valuable aggregate resource. Los Angeles Abrasion Test: 21-35% loss; Soundness Test: 2.0% loss; Absorption: 0.4-1.6%.

ONONDAGA FORMATION (MIDDLE DEVONIAN)

(Equivalent to the Detroit River Group, with a textural change) Composition: Edgecliffe Member: medium-bedded, fine- to medium-grained, dark grey cherty limestone with an estimated thickness of 25 to 30 feet (8 to 9 m). Clarence Member: massive-bedded, dark grey brown, fine-grained, very cherty limestone having an estimated thickness of 26 feet (8 m). Moorehouse Member: medium-bedded, dark grey brown or purplish brown, fine- to coarse-grained, variably cherty limestone with an estimated thickness of 15 to 25 feet (5 to 8 m). Uses: Quarried for crushed stone on the Niagara Peninsula at Welland and Port Colborne. High chert content makes much of the material unsuitable for concrete aggregate.

OTTAWA FORMATION (MIDDLE ORDOVICIAN)

Composition: Lower Phase (Lowville and Pamela Beds): shale, some sandstone and dolostone. Thickness: 100 feet (30 m). Middle Phase (Hull, Rockland, and Leray Beds): pure, thick-bedded, crystalline limestone. Thickness: 150 feet (46 m) near Ottawa. Upper Phase (Cobourg and Sherman Falls Beds): pure and impure crystalline limestone with few to numerous shaly partings, 450 to 475 feet (137 to 145 m) thick near Ottawa. Uses: The Leray, Rockland, and Hull Beds have been quarried extensively for crushed stone and for building stone. In addition, the Hull Beds are an excellent source of lime for cement production and agricultural uses.

OXFORD FORMATION (LOWER ORDOVICIAN)

Composition: Medium- to thick-bedded, grey dolostone, with some shaly partings. Thickness: 240 feet (73 m). Uses: Quarried for crushed stone (road and concrete aggregate) at Ottawa, Brockville, and Smiths Falls.

BEDROCK SUITABLE FOR LIME PRODUCTION AND OTHER CHEMICAL USES.

DETROIT RIVER GROUP (MIDDLE DEVONIAN)

(Equivalent to the Onondaga Formation in the Niagara Peninsula, with a textural change). Composition: Near Beachville, the group consists of medium- to micro-crystalline, medium-bedded, high purity limestone. It grades northwards near St. Marys to soft, evenly bedded, fine-grained dolostone with bituminous laminae. Massive, porous, reef facies material also occurs to the north (Formosa Reef Limestone). Thickness: 100 feet (30 m) at Beachville, 350 feet (107 m) at Clinton. Uses: The most important

source of high purity limestone in Ontario is the Lucas Formation of the Detroit River Group at Beachville. Detroit River limestone produces 80% of Ontario's cement. Its dolomitic reefal facies is also important for lime production to the north. It is generally unsuitable for crushed stone. The Anderdon Member of the Lucas formation is quarried at Amherstburg for crushed stone.

GRENVILLE MARBLE (PRECAMBRIAN)

Composition: Recrystallized white limestone and dolostone, fine- to coarse-grained, usually of high chemical purity. Uses: Lime production, but also in small amounts for terrazo chips, poultry grit, decorative stone, and building stone.

GUELPH FORMATION (MIDDLE SILURIAN)

Composition: Aphanitic- to medium-crystalline, thick-bedded, soft, porous dolostone, characterized in places by extensive vuggy, porous reefal facies dolostone of high chemical purity. The Guelph Formation and the underlying Amabel Formation have a combined thickness of 200 feet (61 m) on the Niagara Peninsula and more than 400 feet (122 m) on the Bruce Peninsula. Uses: The main use is for dolomitic lime in the construction industry. It is quarried at Glen Christie and Guelph.

LINDSAY FORMATION (MIDDLE ORDOVICIAN)

Composition: Lower Member: fine-crystalline, rubbly, nodular, weathering limestone. Upper Member: grey calcareous claystone with shaly partings and bioclastic layers. The rock is "soft" and weathers to rubble. Both members are characterized by low dolomite content and by numerous clayey partings. Uses: Quarried at Picton, Ogden Point, Colborne, and Bowmanville for lime. It is generally unsuitable for crushed stone, concrete aggregate, or granular base course.

VERULAM FORMATION (MIDDLE ORDOVICIAN)

Composition: Fossiliferous, pure to argillaceous limestone and interbedded calcareous shale. The rock is not resistant to erosion and commonly weathers to rubble. Thickness: 200-300 feet (61-91 m). Uses: Quarried at Picton, Ogden Point, and Mara Township for lime. It is unsuitable for crushed stone due to clay impurities and many clayey interbeds, low abrasion resistance. High soundness losses and poor freeze-thaw resistance.

BEDROCK SUITABLE FOR BRICK AND TILE MANUFACTURE

GEORGIAN BAY FORMATION (UPPER ORDOVICIAN)

(Formerly known as the Meaford-Dundas and Blue Mountain shales in the Toronto and Bruce Peninsula areas). Composition: Soft, fissile, blue grey shale with limey or sandy lenses in a few places. Thickness: 640 feet (195 m) at Toronto. Uses: Five producers in Metro Toronto and Cooksville produce brick and structural tile (Guillet 1967). Lightweight aggregate is also produced at Streetsville by heat expansion of the shale.

HAMILTON GROUP (MIDDLE DEVONIAN)

Composition: Grey shale with interbeds of crystalline and cherty limestone. The Group has six formations. Only the Arkona is of commercial value. It is a soft, light grey, calcareous shale which is plastic and easily worked when wet. Thickness: 80 to 300 feet (24 to 91 m). Uses: The Arkona Formation is extracted at Thedford and near Arkona for production of drainage tile and brick.

QUEENSTON FORMATION (UPPER ORDOVICIAN)

Composition: Red, thin- to thick-bedded, sandy to argillaceous shale with green mottling and banding. Thickness: 400 to 500 feet (122 to 152 m). Uses: There are 12 large shale quarries developed in the Queenston Formation in the Toronto-Hamilton region and one at Russell, near Ottawa (Guillet 1967). All produce brick for construction. The Queenston Formation is the most important source material for brick manufacture in the Province.

BEDROCK SUITABLE FOR OTHER INDUSTRIAL PRODUCTS

NEPEAN (POTSDAM) FORMATION (CAMBRO-ORDOVICIAN)

Composition: Creamy, coarse-grained, silica sandstone. Uses: Quarried throughout its area of outcrop for building stone, decorative stone, abrasives, and for glass making.

SALINA FORMATION (UPPER SILURIAN)

Composition: Grey and red shale, brown dolomite, and, in places, salt, anhydrite, and gypsum. The formation consists predominantly of evaporite deposits with up to eight members identified. Uses: Gypsum is mined at Hagersville, Caledonia, and Drumbo. Salt is mined at Goderich and is produced from brine wells at Amherstburg, Windsor, and Sarnia.

WHITBY FORMATION (UPPER ORDOVICIAN)

(Formerly known as Collingwood Shale near Toronto). Composition: Brown to black fissile shale. Uses: Quarried at Bowmanville for use in cement production. Testing indicates that the Whitby Formation may produce satisfactory lightweight expanded aggregate.

G 1 OW

S 1 LP

G 1 K

TOWN OF MILTON

CITY OF BURLINGTON

TOWN OF OAKVILLE

CITY OF BURLINGTON

TP. OF FLAMBOROUGH

BRONTE CREEK

MOUNT NEMO

ESCARPMENT

CANADIAN NATIONAL

Queen Elizabeth Way

Louville

Kilbride

Cedar Springs

Zimmerman

Tansley

Nelson

Applebry

Lake Medad

Greenhouse

Airfield

Golf Course

Factory

Radio

Park

Reservoir

Filtration

Dam

Ski Lift

Pipeline

Gas

Oil

N

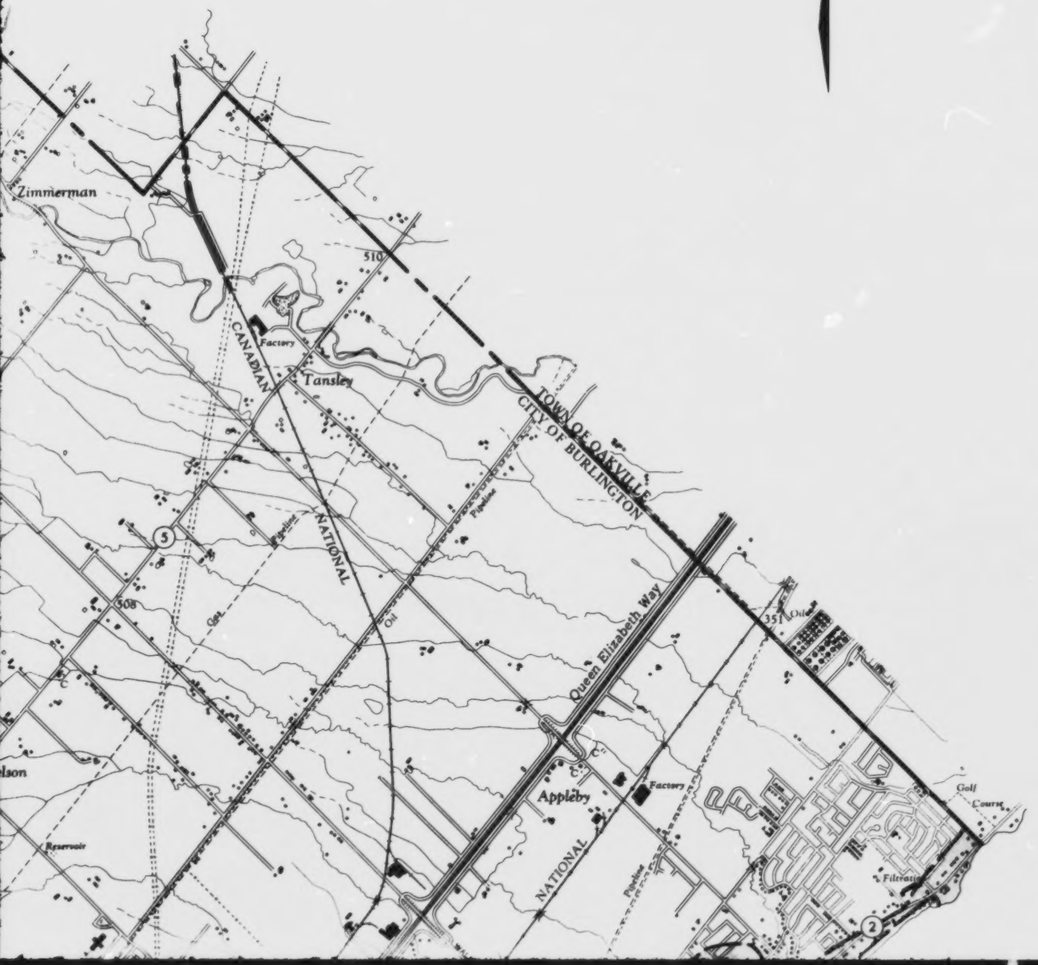
Zimmerman
510
CANADIAN
NATIONAL
Factory
Tansley
TOWN OF OAKVILLE
CITY OF BURLINGTON
Queen Elizabeth Way
508
Applebry
Factory
Golf Course
Reservoir
Filtration
Plant
Gas
Pipeline
Oil
Pipeline
Pipeline
Pipeline
Gas
Pipeline
Oil
Pipeline
Gas
Pipeline
Oil
Pipeline
Gas
Pipeline
Oil

S 1
G 1 K
S 1 LP
G 1 OW
S 1 LP
S 2 LP
S 3 LP
G 2 LB
S 3 LP
S 3 LP
CITY OF BURLINGTON
TP. OF FLAMBOROUGH
ESCARPMENT
Nelson
Lake Medad
Appleby
NATIONAL
Queen Elizabeth Way
TOWN OF OAKVILLE
CITY OF BURLINGTON
R.M. OF HAMILTON/WENTWORTH
TOWN OF DUNDAS
CITY OF HAMILTON
NIAGARA
CANADIAN
Bridgeview Survey
Willow Pt
BOTANICAL GARDENS
HAMILTON HARBOUR
LAKE ONTARIO
BURLINGTON

SYMBOLS

(Some symbols may not apply to this map)

Geological and aggregate thickness boundary. Shading indicates deposit area.

S 1 IC CLO — Deposit symbol: see below.

3 — Licenced property boundary; Property number: see Table 2.

4 — Unlicenced sand or gravel pit*; Property number: see Table 2
*Abandoned pit or wayside pit operating on demand under authority of a permit.

5 / 23 G — Selected drilling location indicating thickness of overburden overlying reported thickness of granular materials (in feet). (Note: S - sand, G - gravel, T - till)

DEPOSIT SYMBOL

Deposits are identified by gravel content, thickness class, deposit type and quality indicators. Gravel content is expressed as percentage of crushable material. Classes are based on potential aggregate tonnage per acre and are designated numerically. Type refers to geologic origin. Quality modifiers indicate variations in grain size distribution and lithology.

Gravel Content	Thickness Class	Geological Type
		Quality Indicators

Gravel Content

G	Greater than 35% gravel.
S	Less than 35% gravel.

DEPOSIT SYMBOL (Continued)

Thickness Class

Class	Average Thickness in feet (metres)	Tons per acre (Tonnes per hectare)
1	greater than 20 (> 6)	greater than 50,000 (>112 000)
2	10-20 (3-6)	25,000-50,000 (56 000 - 112 000)
3	5-10 (1.5-3)	12,500-25,000 (28 000 - 56 000)
4	less than 5 (< 1.5)	less than 12,500 (<28 000)

Geological Type

IC	Undifferentiated Ice-Contact Stratified Drift	OW	Outwash
ICT	Ice-Contact Terrace	LB	Lacustrine Beach
K	Kame	LP	Lacustrine Plain
E	Esker	LD	Lacustrine Delta
EM	End Moraine	AL	Older Alluvium
		WD	Windblown Forms

(see Appendix C for descriptions of Geological Types.)

Quality Indicators

	If blank, no known limitations present
C	Clay and/or silt (fines) present in objectionable quantities
L	Deleterious lithologies present
O	Oversize particles or fragments present in objectionable quantities

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: P.F. Karrow 1963

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

Issued 1981.

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 45.

BURLINGTON

TOWN OF MILTON
CITY OF BURLINGTON
TOWN OF MILTON
BRONTE CREEK
Lowville
MOUNT NEMO
Zimmerman
Tansley
CANADIAN NATIONAL
TOWN OF OAKVILLE
CITY OF BURLINGTON
Queen Elizabeth Way
Appleby
Nelson
Lake Medad
CITY OF BURLINGTON
TP. OF FLAMBOROUGH
ESCARPMENT
Airfield
Factory
Golf Course
Park
Dam
Reservoir
585
582
510
920
358
351
1
2
5
N

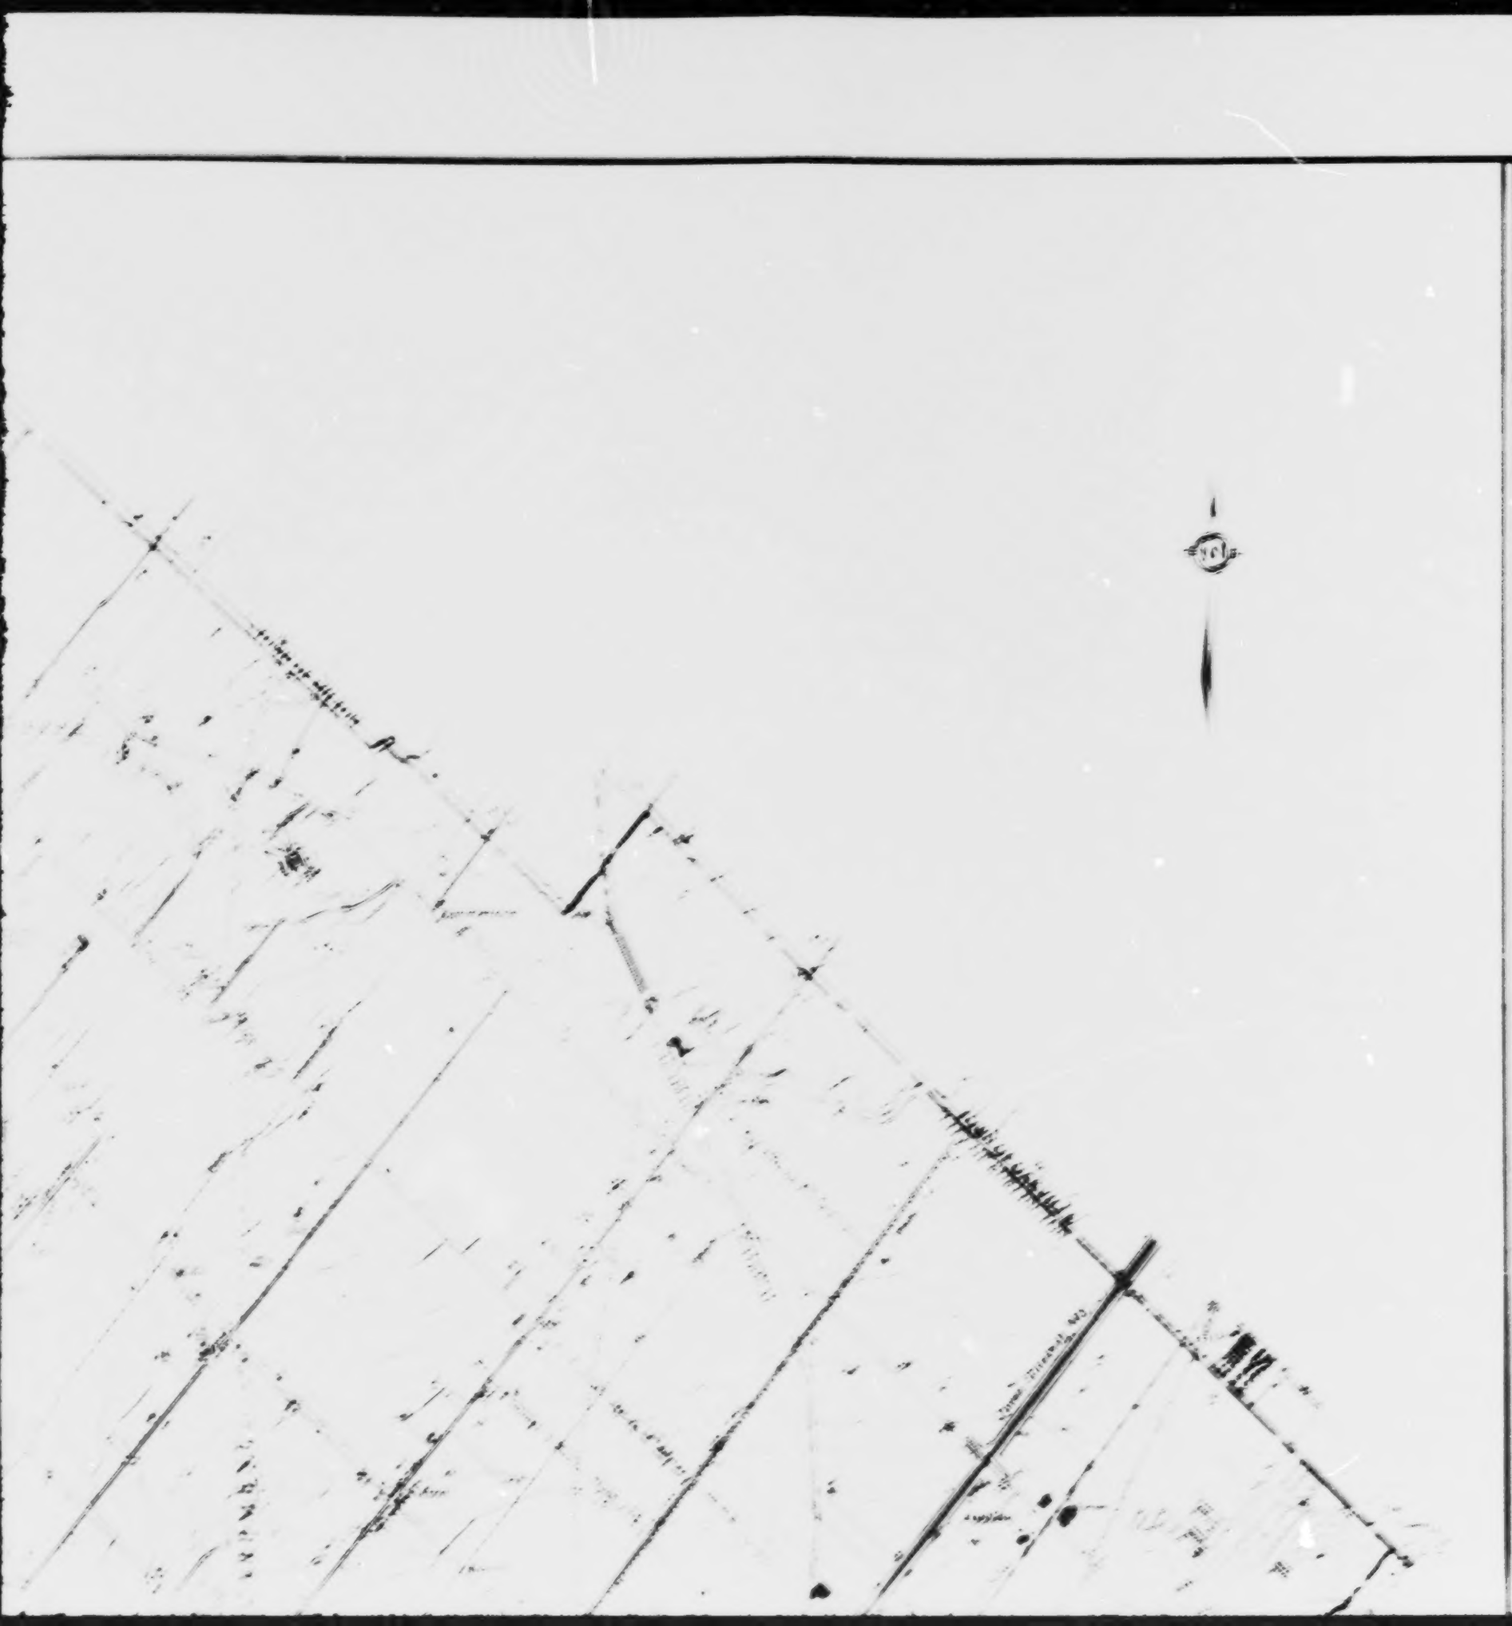

Ministry of Natural Resources

Ontario

Hon. Alan W. Pope
Minister

V.T. Fraser
Deputy Minister

ONTARIO GEOLOGICAL SURVEY

AGGREGATE RESOURCES INVENTORY

CITY OF BURLINGTON

REGIONAL MUNICIPALITY OF HALTON

MAP 2

SELECTED SAND AND GRAVEL RESOURCE AREAS

Scale 1:50 000

1000 0 1 Kilometre

UTM Reference: 2 BY MS

DMNR-0153 1981

SYMBOLS

Some symbols may not appear on this map.

Bedrock and aggregate thickness boundary

Selected sand and gravel resource area. Number corresponds to description in Table 1

Selected sand and gravel resource area, bedrock not mapped

CITY OF BURLINGTON
TP. OF FLAMBOROUGH
ESCARPMENT
Nelson
Lake Medad
Golf
Park
Dam
Reservoir
Radio
Park
Pond
Res
Greenhouses
Appleby
Factory
Queen Elizabeth Way
NATIONAL
Pipeline
Golf Course
Federation
Greenhouse
CITY OF HAMILTON-WENTWORTH
R.M. OF HALTON
NIAGARA
Grindstone
CANADIAN
Burlington
Beach
Bridgeview
Survey
TOWN OF DUNDAS
403
BOTANICAL
GARDENS
CITY OF HAMILTON
Willow Pt
HAMILTON HARBOUR
LAKE ONTARIO

BURLINGTON

BURLINGTON

SYMBOLS

(Some symbols may not apply to this map)

- Geological and aggregate thickness boundary.
- Selected sand and gravel resource area, Primary significance. Deposit number see Table 3.
- Selected sand and gravel resource area. Secondary significance.
- Selected sand and gravel resource area; Tertiary significance.
- Licenced property boundary. Property number see Table 2.
- Unlicenced sand or gravel pit*; Property number: see Table 2. *Abandoned pit or wayside pit operating on demand under authority of a permit.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: P.F. Karrow, 1963

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

Issued 1981

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 45.

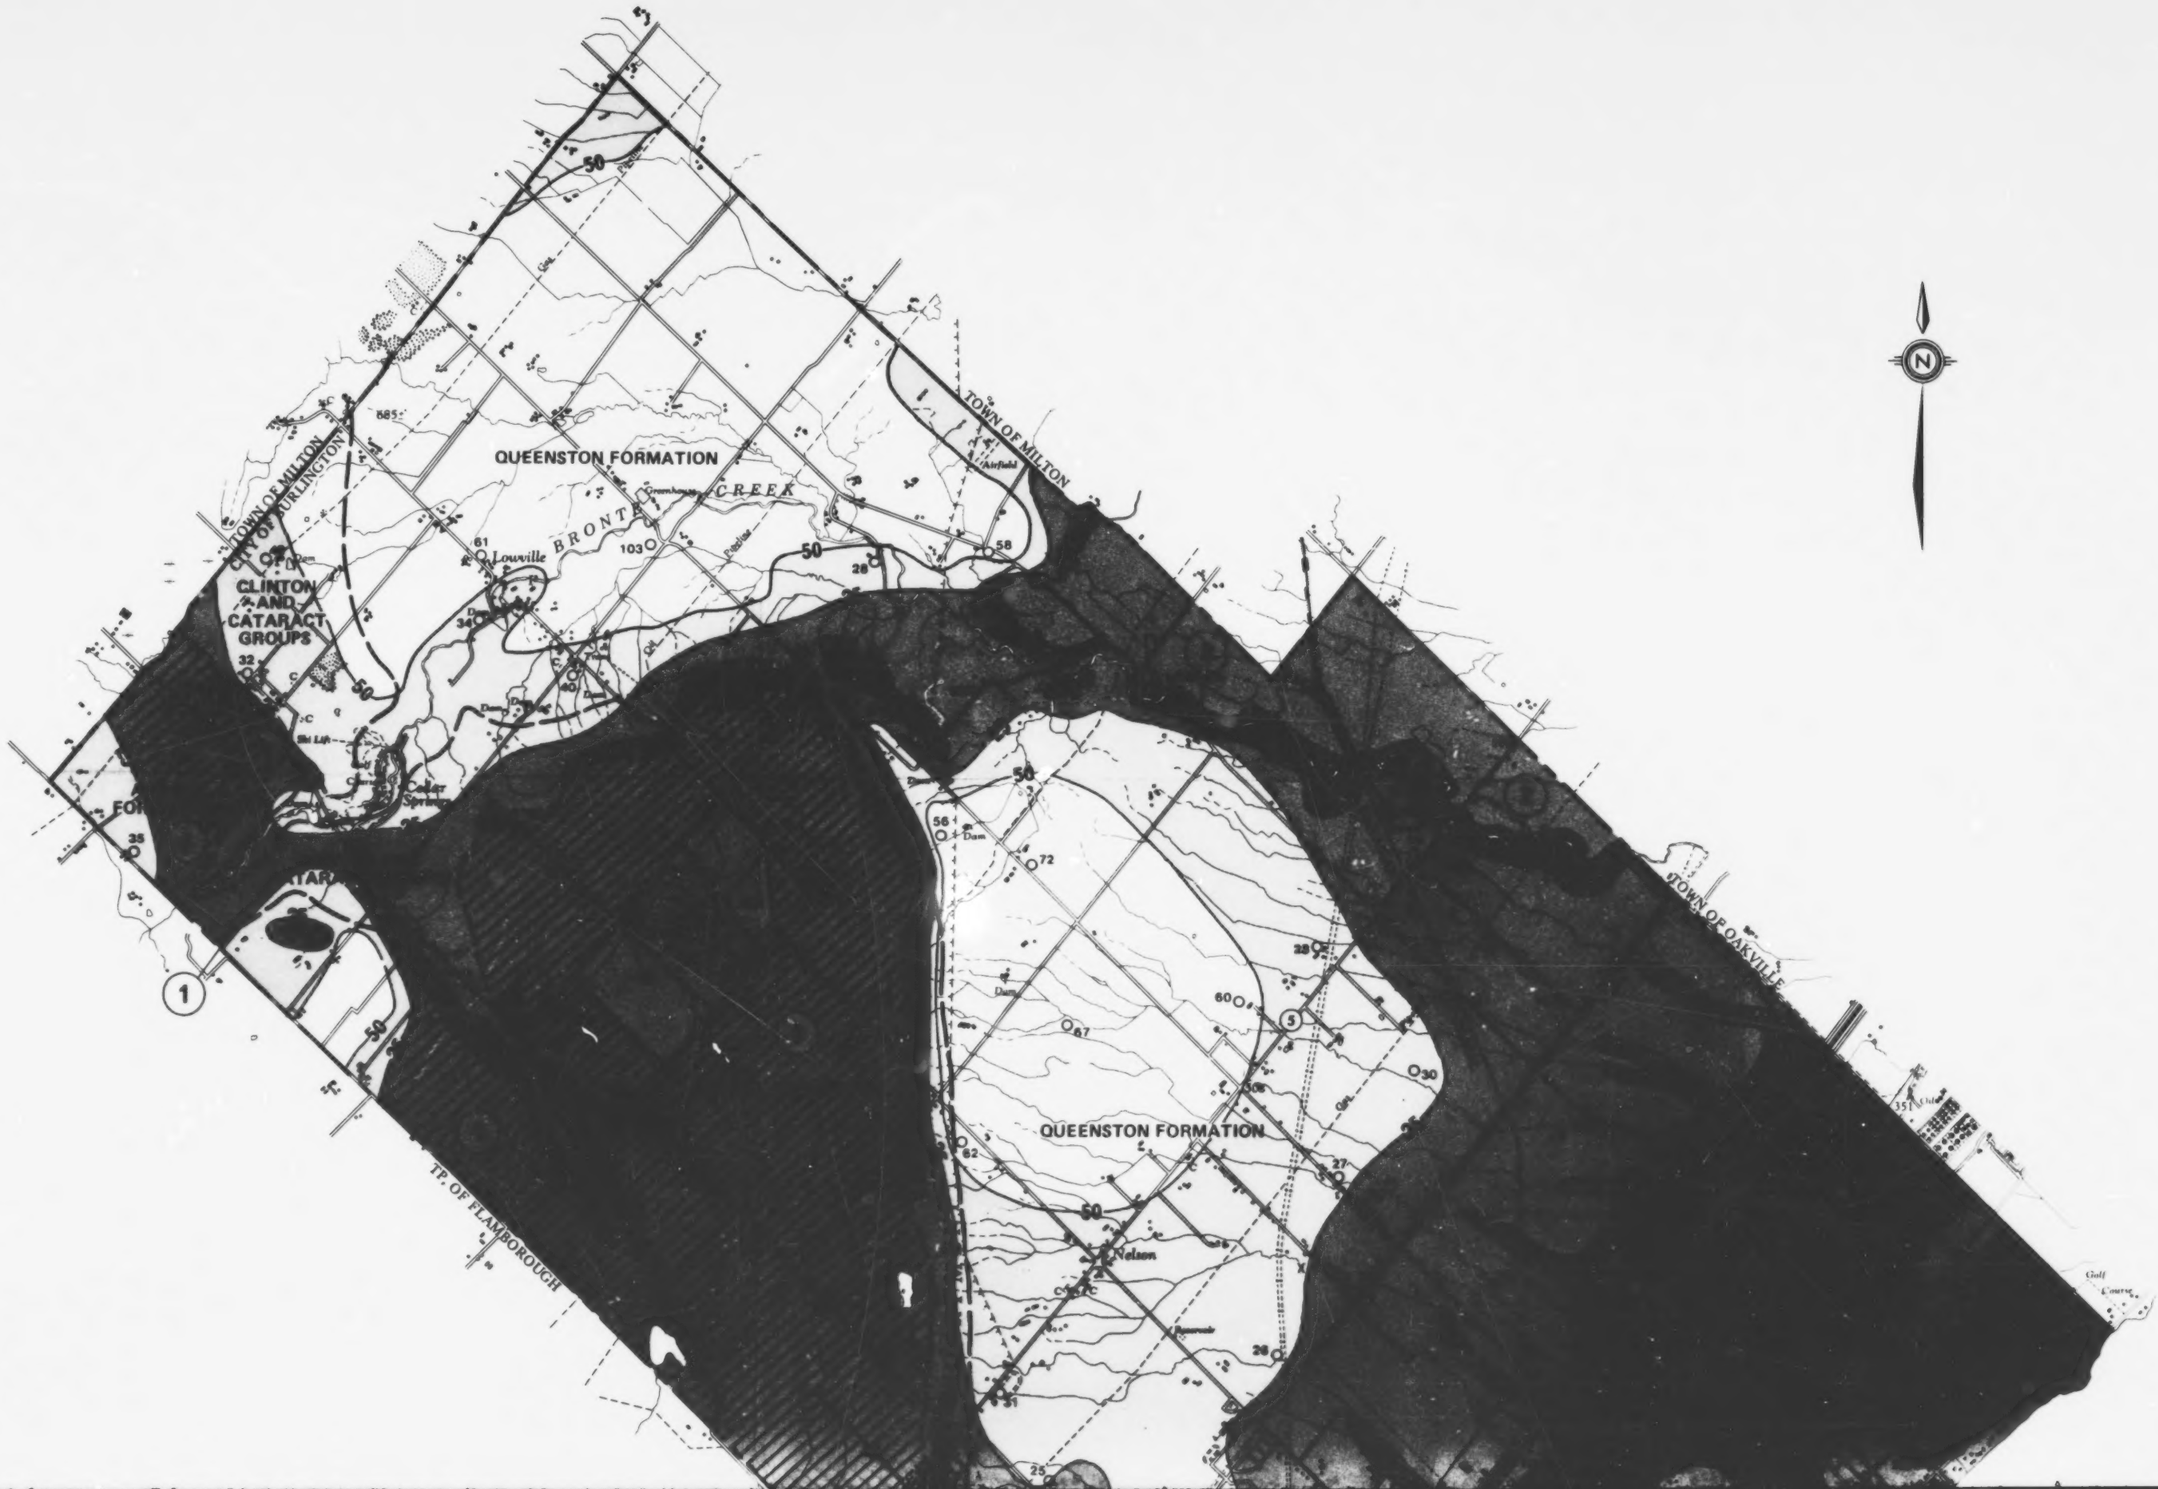
QUEENSTON FORMATION
BRONTE CREEK
TOWN OF MILTON
CITY OF BURLINGTON
TOWN OF MILTON
CITY OF
CLINTON
AND
CATARACT
GROUPS
Lowville
Ski Lift
Cedar Springs
Dam
Airfield
Golf Course
TP. OF FLAMBOROUGH
TOWN OF OAKVILLE
QUEENSTON FORMATION
Nelson
50
585
61
103
58
56
72
67
60
62
27
30
28
25
35
32
34
40
1
3
5

Ministry of Natural Resources

Ontario

Hon. Alan W. Pope
Minister

W.T. Foster
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

CITY OF BURLINGTON
REGIONAL MUNICIPALITY OF HALTON

MAP 3
BEDROCK RESOURCES

Scale: 1:50 000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: **30 M/5**

© OMNR-OGS 1981

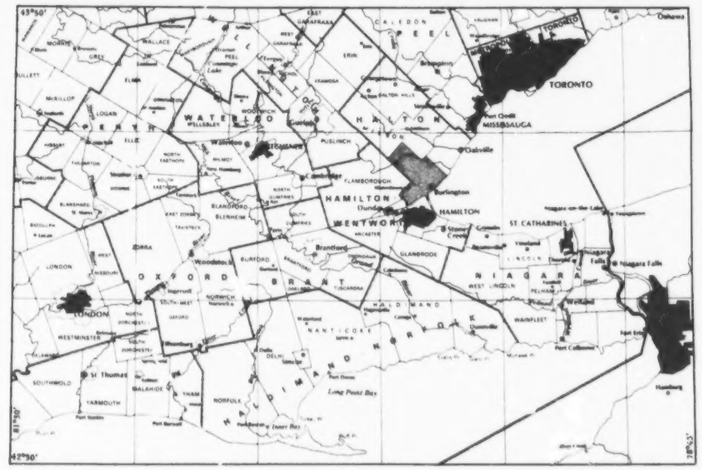

LEGEND

PALEOZOIC

SILURIAN

MIDDLE AND LOWER SILURIAN

AMABEL FORMATION

Dolostone

CLINTON AND CATARACT GROUPS

Sandstone, shale, dolostone

ORDOVICIAN

QUEENSTON FORMATION

AMABEL FORMATION

CLINTON AND CATARACT GROUPS

CLINTON AND CATARACT GROUPS

AMABEL FORMATION

TP. OF FLAMBOROUGH

TOWN OF DUNDAS

CITY OF HAMILTON

Nelson

Willow Pt

LAKE ONTARIO

HAMILTON HARBOUR

BURLINGTON

(So

Geologi

Bounda

25 Drift th

X Isolated

Bedrock

Bedroc
see Tab

Bedroc
den se

1 Selecte

Q3 Licence

Q4 Unlicer
*Aband
under

O 38 Selecte
(in fee

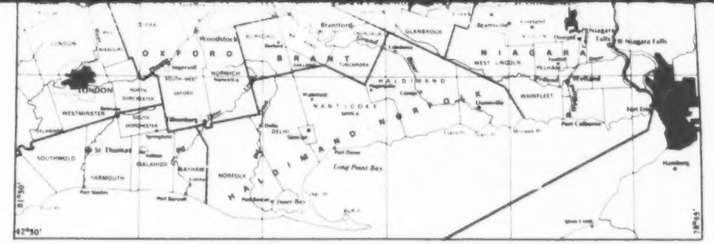

LEGEND

PALEOZOIC

SILURIAN

MIDDLE AND LOWER SILURIAN

AMABEL FORMATION
Dolostone

CLINTON AND CATARACT GROUPS
Sandstone, shale, dolostone

ORDOVICIAN

UPPER ORDOVICIAN

QUEENSTON FORMATION
Red shale

SYMBOLS
(Some symbols may not apply to this map)

- Geological boundary.
- Boundary for selected bedrock resource areas 3 and 4.
- 25 — Drift thickness contour line (25 foot (8 m) interval).
- x — Isolated bedrock outcrop.
- Bedrock within 3 feet (1 m) of surface see Table 4.
- Bedrock covered by 3 to 25 feet (1 m to 8 m) of overburden see Table 4.
- Bedrock covered by 25 to 50 feet (8 m to 15 m) of overburden see Table 4.
- 1 — Selected bedrock resource area, Deposit number see Table 6.
- Q3 — Licenced quarry boundary, Property number see Table 5.
- Q4 — Unlicenced quarry*; Property number: see Table 5.
  *Abandoned quarry or wayside quarry operating on demand under authority of a permit.
- O 36 — Selected drilling location indicating reported depth to bedrock (in feet).

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: B.A. Liberty, I.J. Bond and P.G. Telford, 1976
M.A. Vos, 1969

Compilation and drafting by: Staff of the Aggregate Assessment Office.

Issued 1981.

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 45.